

## Wood heating

Logs and pellets

2017 • 2018

made in  
France  
ISO 14001 CERTIFIED

# INVICTA

Plus beau. Plus chaud. Moins cher.

N°1 IN EUROPE



|            |  |  |
|------------|--|--|
| <b>04</b>  |  | Invicta, European leader in wood burning stoves. |
| <b>06</b>  |  | Beautiful. Comfortable. Affordable.              |
| <b>12</b>  |  | Invicta'sûr.                                     |
| <b>14</b>  |  | Choose your fuel wisely.                         |
| <b>16</b>  |  | Choose your stove wisely.                        |
| <b>18</b>  |  | Take full advantage of your stove.               |
| <b>20</b>  |  | Favourites.                                      |
| <b>30</b>  |  | Hybrid stoves.                                   |
| <b>36</b>  |  | Ductable stoves.                                 |
| <b>48</b>  |  | Cast iron stoves.                                |
| <b>94</b>  |  | Steel stoves.                                    |
| <b>102</b> |  | Pellet stoves.                                   |
| <b>114</b> |  | Wood cooker.                                     |
| <b>115</b> |  | Accessories.                                     |
| <b>116</b> |  | Comparative tables.                              |

# Invicta, European leader in wood burning stoves.

## Cast iron, made in France

made in  
france

Invicta, French foundry and enamel plants, have been established since 1924 in Donchery in the French Champagne-Ardenne region. With an annual production of 170,000 wood-burning appliances, the group is No. 1 in Europe. Invicta manages the entire production process: research and development, design, COFRAC certified laboratory for testing, foundry, enamel plant, Heating treatments, marketing and distribution. Invicta designs and manufactures a wide range of appliances, while innovating on a yearly basis.



# INVICTA



## The benchmark brand

Also famous for its advertisements, over the years Invicta has become the benchmark brand in the wood burning stove sector. In 2016, Invicta opened its pilot retail store in the heart of Paris, which will showcase the brand's most emblematic wood burning products... and a lot more.

## Diverse expertise

Invicta's expertise has spread to many sectors: wood burning stoves, hybrid stoves, pellet stoves, hearths and inserts for fireplaces, but also barbecues, cast iron cookware, decoration and furniture.



## Research and innovation

Optimizing, innovating and revolutionizing are the three watchwords at Invicta's R&D division. Some innovations conceived by Invicta, like the post combustion system and reverse combustion, have greatly contributed to the optimization of energy performance. Others, like the Air-control technology, improve the user experience by providing better control of the burn rate. The technical team at Invicta works day after day to create more environmentally friendly products, just as our customers expect.



## An ecofriendly approach



ISO 14001 CERTIFIED

flamme  
VERTE

Le label  
du chauffage  
au bois




Invicta continually improves the energy performance of its wood heating appliances, set in motion by creation of the Flamme verte label. The 6 or 7 star rating established in January 2015 encourages companies to manufacture environmentally friendly products. The COFRAC certified Invicta laboratory conducts systematic quantitative tests (performance, CO rate, dust concentration) on new models. The majority of our brand's appliances are Flamme verte 5, 6 or 7 stars. Invicta's ISO 14001 certification is further proof, if needed, of its commitment to protecting.

## Partner of Ademe

Initiated by ADEME, a program to study and measure emissions generated by the use of biomass has been established to evaluate the nature and quantity of gaseous pollutants, as well as their particle size and residual particle distribution. This program aims to improve combustion and invites scientists from the Management of Risk and the Environment Laboratory of the University of Haute-Alsace and Invicta. This research is part of the Invicta approach, and naturally Invicta's Research and Development team is very involved there.





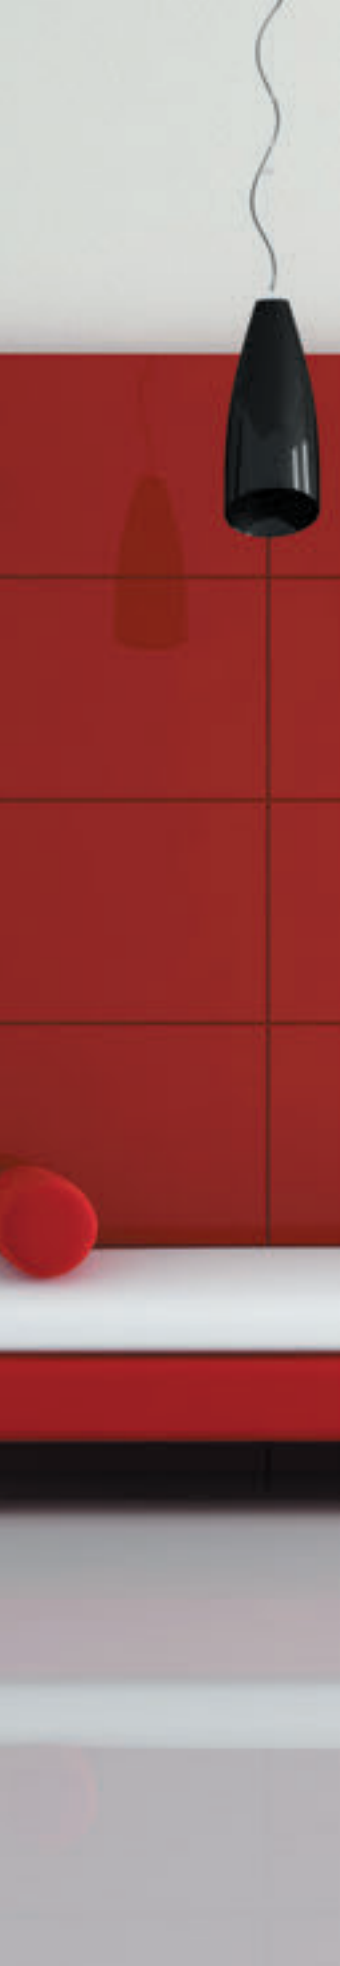

# Beautiful.

A true innovator, Invicta revisited the wood burning stove, developing new, cleaner product lines that satisfy your sense of interior design, with a modern twist. This vision combines sleek design with accessibility, and is perfectly in tune with the times. Invicta's approach is part of what has come to be known as "**democratic design**".

This approach is based on five pillars:

**Form:** it is the quality of the line, the sketch, that makes the stove a complete aesthetic object. It adds style to any home. The stove becomes the heart of the home, and the central decorative element. This is obviously the most common meaning of the word design.

**Function:** Invicta stoves are perfectly designed, not only in its aesthetic dimensions, but also in its functionality. Performance, efficiency and usability guaranteed. And they're ergonomic, that is to say, optimized for a natural and intuitive use.

**Quality:** while remaining accessible, Invicta wood burning stoves have a level of quality that is recognized worldwide. They are made in France, in the Ardennes. The quality level is controlled at every stage to be unfaltering.

**Sustainability:** from the stove's conception Invicta designers never lose sight of the sustainability of the appliance throughout its life cycle. The materials are recyclable, and the fuel is the most abundant source of renewable energy in France. Durability is an integral part of the design.

And evidently **the price**.

# Comfortable.

For nearly a century, Invicta has been learning to tame the heat.

The first step is the optimization of the wood burning chamber: the ideal proportions are passed down by Ironmasters through word of mouth, until finally Invicta engineers and designers set about refining them continually, to be adapted to new forms, while improving the performance and heating power of their stoves.

The next step is research of combustion characteristics: the nature of fuel, optimization of air circuit, analysis of gases emitted, study of their residues and further technological innovations (post combustion, reverse combustion, Air-Control, dual log and pellet stoves).

But the advanced management of heat is born in the Invicta foundry, with its exceptional qualities of its cast iron: excellent thermal conductivity, remarkable inertia. It will keep and distribute heat radiantly and consistently. It withstands extreme temperatures and heat distortion. And last, but certainly not least: a cast iron stove is 100% recyclable.







BEAUTIFUL. COMFORTABLE. AFFORDABLE.

Gaya Ardoise p.80

**INVICTA**





# Affordable.

For Invicta, design is only meaningful if it is accessible to the greatest number of people.

This has been our vocation for decades. Invicta is committed day to day to making this dream possible, so that everyone can afford the best in design and performance. With this philosophy, Invicta Group has become the European leader in wood burning stoves. Whatever your budget, you will find an Invicta stove with both excellent design and high performance, and watching it in your living room will be a daily joy.

This universal affordability is so central that it has become the signature of the brand.  
Invicta. Beautiful. Comfortable. Affordable.

# For the starting-up of its stoves, INVICTA creates

## INVICTA'SÛR



### **It's easier**

Simply register with us to receive our complete service:

- On the website [www.invicta.fr](http://www.invicta.fr) services section
- Or simply by calling  **0 809 10 00 13** only in France.

APPEL GRATUIT DEPUIS UN POSTE FIXE

### **It's faster**

After registration, the Invicta'sûr independent contractor will call you within 5 days (excluding weekends and holidays).

After validation, the intervention takes place within 15 working days.

### **It's more reliable**

The manufacturer implement the starting up of your stove.

### **It's safer**

Upon arrival, the Invicta technician makes sure your installation complies with regulations.

### **It's more comfortable**

The technician calibrates your stove taking into account your needs, and the comfort you require.

\* Please check list of independent contractors on our website [Invicta.fr](http://Invicta.fr) Services section.

Compliance  
controls

First  
usage

Programming

Training  
of use

Maintenance  
advice

SERVICE ONLY  
AVAILABLE  
IN FRANCE



# Choose your fuel wisely

You have decided to purchase a wood burning stove combining affordability, environmental aspects and performance. But the question remains "what fuel, and what stove, best meets your heating needs?" Logs or pellets? Here is a comparison of the two families of stoves to help you choose the most suitable.



## Pellet stoves: performance and practicality

**Autonomy.** With their large capacity hopper, pellet stoves do not require regular supply. In addition, they are programmable and certain models are even remotely controllable.

**Constant comfort.** Simple to use, they produce a soft and constant heat over a long period without any effort on your part to keep the flame burning. Pellet stove technology combines efficiency and practicality, bringing you freedom and flexibility.

**Fuel quality.** The pellets are composed of sawdust and wood residue, making an excellent fuel. With their high energy performance, they produce an efficient and comfortable heat.

**High performance.** Reaching 80% to more than 90% efficiency, pellet stoves usually exceed the performance of traditional log systems. They have been awarded the "Flamme verte" label. Their autonomy is also higher. Some Invicta models have a feed hopper of 22 kg, allowing you enjoy up to 36 hours of heat.

**Higher purchase price and utilization cost.** The initial investment is higher for pellet stoves. In addition, the fuel, pellets, is more expensive than logs.



# Log stoves: savings, aesthetics and enjoyment

**Atmosphere.** Very popular, especially with families, log stoves continue to captivate through the sublime spectacle of fire they offer. Contemporary appliances uniting design and pleasure, Invicta log stoves fit perfectly in any home and come in many forms for a flawlessly warm atmosphere. Log stoves run silently thanks to their natural convection, leaving you to enjoy the crackling of flames.

**Competitive price.** Log stoves are cheaper to use because the fuel is more widely available than pellets. In terms of running costs, they are the most competitive stoves on the market. Meeting the requirements of the "Green Flame" label, log stoves provide up to 80% energy efficiency. Note that these appliances diffuse heat quickly and do not require electricity to operate.

**A variety of log sizes.** Depending on their size, Invicta wood burning stoves can accommodate different log lengths - 25, 33, or 50 cm. Smaller logs will however provide optimal performance. Two 25cm logs have a higher calorific value than one 50cm log.

**Autonomy.** Unlike pellet stoves, autonomy is limited to a few hours without human intervention. There is an extended burning mode to allow you to easily restart the stove after several hours.

**Authenticity.** If you are looking for a unique and intense experience, the log stove is for you. As long as you don't mind rekindling the flame from time to time!

## To sum up...

|                     | Logs | Pellets |
|---------------------|------|---------|
| Stove cost          | 🔥🔥   | 🔥🔥🔥     |
| Cost of fuel        | 🔥    | 🔥🔥      |
| Maintenance cost    | 🔥    | 🔥🔥      |
| Efficiency          | 🔥🔥   | 🔥🔥🔥     |
| Autonomy            | 🔥🔥   | 🔥🔥🔥     |
| Ease of use         | 🔥🔥   | 🔥🔥🔥     |
| Beauty of the flame | 🔥🔥🔥  | 🔥🔥      |



## Invicta has a solution for the indecisive persons

Become a master of fire by opting for a dual fuel burner! Invicta offers you a range of products that combines the advantages of both fuels: the dual fuel stoves (MIX, AKIMIX and CAROLO MIX). With an autonomy of 12 to 17 hours with pellets and a wood burning chamber which takes logs up to 38cm, you will be free to choose between ease of use and the warmth of a wood fire.

# Choose your Invicta's stove wisely.

## Design

Contemporary, vintage, rectangular, oval, original, traditional, anthracite, ivory enamel or bright red... Choosing an Invicta wood burning stove is as easy as falling in love. One thing is sure, this decorative object will not go unnoticed in your living room. So let your eyes guide you, and let out your inner interior designer!



## Performance

Invicta stoves offer a wide range of thermal performance. In this catalogue we've highlighting the heating Heating, the optimum power and the power range. These characteristics will guide your choice towards the ideal stove. The Flamme Verte ranking, with 5, 6 or 7 stars, will guide you to the most efficient and environmentally friendly appliances.



## Sizing and installation

A good wood burning appliance is primarily a stove, a fireplace, or a fireplace insert perfectly adapted to your needs. Do not hesitate to contact an industry professional, a certified steward of the environment. They will help choose the ideal product in terms of heating volume, insulation and configuration for your home, or possibly the finer points of RT2012 constructions... They will determine a suitable location based the flue, the size of the appliance and safety distances required.



## Price

Price is of course an important criterion. When you set your budget, remember to take into account any applicable subsidies. And remember, you won't be changing your Invicta wood stove every 5 or 10 years, this is a long term investment.



# Technical features

## POST COMBUSTION

### EXCLUSIVE POST-COMBUSTION SYSTEM

Injection of pre-heated air into the combustion chamber. The additional air arrival by the back of the refox enables the re-lighting of combustion residues, dust and hydrocarbon thus obtaining a complete combustion and a reduced pollution emission.

### SECONDARY AIR WITH DOUBLE FUNCTION

Secondary air protects the glass against smoke and soot deposit. It optimizes the combustion of volatile materials.

### MORE EFFECTIVE PRIMARY-AIR CONTROL

The lighting booster facilitates the starting of the fire. More precision and flexibility to choose the fire pace.

## AIR-TIGHT STOVE Compatible RT 2012

### AIR-TIGHT STOVE WITH POSSIBLE CONNECTION OF AIR SUPPLY

Compatible with sustainable houses / centralized fresh air supply from the duct:

- no outside air passage in the room.
- possibility to connect an air supply duct drawing fresh air from the outside or crawl space.

## 100% CAST- IRON

### 100 % CAST-IRON APPAREL

Long-life material and 100 % recyclable / ideal material for heating

- excellent thermal conductivity, gentle heat and high inertia : stores the heat and releases it progressively.

## AIR CONTROL

### CENTRALIZED MANUAL ADJUSTEMENT OF AIR DISTRIBUTION WITH SINGLE CONTROL

Modulation of the fire pace from mini to maxi with collector / distributor technology meeting the necessary balance between the different air flows :

- simple and balanced management of whole air distribution : primary, secondary and post-combustion
- better control of the fire pace : mini, normal and maximum
- better control of wood consumption
- more effective and regular airwash (secondary air)
- cleaner and better combustion
- possibility to stop completely the air flow during extended interruption of the apparel.

## refractory CONCRETE BRICKS

## Chamotte BRICK COVER

### FIREBOX COVERED WITH CHAMOTTE BRICKS OR REFRACTORY CONCRETE BRICKS

Faster warming-up of the hearth / contribute to reduce CO level and dust emissions, and maintain the glass clean.

# Take full advantage of your stove

## 1. Consider fuel quality

Whether you use logs, pellets or wood chips, you won't get the most out of your stove without a quality fuel. If it is unsuitable or of poor quality, the fuel will be the primary cause of issues with your stove, of degraded energy performance and outside air pollution.

### Logs

#### Suitable wood species

There are two main families of wood classified according to their density:

- > The hardwoods (oak, beech, ash, hornbeam, alder, maple, elm, walnut, fruit trees...)
- > The softwoods (spruce, fir, pine, larch) and soft deciduous (poplar, willow, birch, linden...)

Logs of hardwood, denser, and with greater calorific value are recommended for domestic stoves, with the exception of chestnut which spits as it burns.

Tender hardwoods and softwoods burn too quickly. The resinous softwoods may, in addition, clog the pipes and the appliance itself. For a more intense flame or to rekindle the fire, choose light woods such as poplar or willow, whose combustion is faster.

#### Dry wood

The moisture content of the wood is an essential factor. Dry wood, ready for burning, (less than 20% moisture relative to gross weight) has twice the energy output of freshly cut wood (45% moisture relative to gross weight)! The more water the wood contains, the more evaporation takes useful energy away, and the less heat is produced.

Freshly cut firewood and packaged in stacks should be stored for a minimum of two years for optimal combustion. Cut, split and stored under shelter in a well ventilated area, the wood dries faster. When improperly stored, wood deteriorates quickly.

### Pellets

Pellets are produced by simple compression of sawdust, without chemical additives. Ultra-compact, they allow high yields and high autonomy. Easy to transport, store and use, they are suitable for all housing types. As with logs, pellets must be stored in a dry space. Their humidity must be less than 10%. They are usually sold in bags of 15 kg.



#### TIP

Split wood before storing it, this helps with its drying. In addition, small logs emit fewer particles than bigger logs.



## 2. Learn to start your fire

Before starting your fire, make sure the fresh air intake near the appliance is not blocked. Empty the ash pan, open the air supply dampers. Recent studies have identified a **reverse ignition process** that can greatly reduce the emissions of fine particles. To do this, first place the thickest logs underneath and then place smaller logs above. Finish with small pieces of dry wood (kindling) and a firelighter. Check the draw and the air intake dampers before lighting the firelighter, then close the door.

### TIP

Wait at least 10 minutes before lowering the air intakes.

## 3. Adjust the chimney draught correctly

An optimized draught saves fuel and reduces pollution. With a weak draught, fuel will not burn easily resulting in insufficient heating and a risk of smoke discharge. The appliance and the chimney may be clogged causing greater pollution. With too much draught, combustion becomes too fast, the temperature of the gas is too high. You waste energy and consume excessive wood. Depending on your appliance, you will have various settings that allow you to optimize the draught. For more information, see the operating instructions for your model.

How to tell if your settings are correct?

- > Each batch of wood should light when you place it in the appliance and keep burning.
- > The stove must not operate without blaze or you may clog the appliance and release noxious fumes into the environment.

### TIP

The power of a stove depends on the amount of wood and the frequency of loading. The optimal power of a stove, expressed in kW corresponds to its wood consumption in kg every 3 hours. Example: optimal power of 12kW equates to a consumption of 4 kg of wood per hour.

## 4. Maintain your appliance

**Use the services of qualified professionals.** A well maintained appliance will save fuel, deliver better wood combustion and have better environmental performance. Your appliance and your installation will also be preserved for years to come.

**Yearly maintenance is mandatory.** A complete inspection of your appliance and its installation must be performed annually by a qualified person. A maintenance certificate that you should keep for 2 years will be given.

**The chimney must be swept twice per year.** Call a qualified professional to carry out two mechanical chimney sweepings of the smoke ducts. One of them must also be done during the heating period. Ideally, the chimney sweeping must be done from the top. Remember to ask for a sweeping certificate. Warning! Chemical sweeping is not a replacement for a mechanical sweeping.

**Regularly clean your wood burning stove. A wood burning stove requires a few simple tasks that you can do yourself:**

**Ashes:** an excess of ashes can block air supply to your fire. For the best performance from your stove, remember to empty the ash pan regularly and to dust the fire grids.

**The glass:** to enjoy the charm of a roaring fire, regularly clean the glass! Dirty glass reflects non-optimized combustion. A very hot burn will also clean the glass through the pyrolysis effect.

**The seals:** also remember to regularly check the condition of the door and glass seals. Pellet stoves require more regular maintenance, see the instructions of the appliance.

### TIP

It's better to clean the glass when it's warm – it's more effective and quick. Moisten newspaper and tap it in some cold ashes. Rub the glass and repeat several times to remove all traces. Rinse with a sponge and water.



# Favourites

Technological innovations, instant love for an innovative design, success with the public: Invicta presents a selection of its preferred models.

Heating surface  
25 to 85 m<sup>2</sup>

Power range  
2,5 to 7 kW

Pellets  
Feed hopper: 16,5 kg





# NOLA 7

With its streamlined style, this pellet stove will fit right into your home, ensuring a unique feeling of well-being.



W 465 X H 1125 X D 500 mm  
Flue diameter 80 mm. Rear flue.  
(Comparative tables: p116)  
Available in 10 kW version p.109

  
Black  
Ref. 6418-74

  
Red  
Ref. 6418-77

  
Grey  
Ref. 6418-78



2-YEAR<sup>RS</sup>  
Warranty

# REMILLY

Compact and efficient, this cast iron wood stove is ideal for tight budgets. Design: Jean-Philippe Dargenton.



Anthracite  
Ref. 601384

W 436 X H 800 X D 364 mm  
Flue diameter 150 mm. Top flue.  
(Comparative tables: p116)



Heating  
surface  
40 to 85 m<sup>2</sup>

Power  
range  
4,5 to 10,5 kW

Optimum  
power  
7 kW  
= 2.3 kg wood / hour

Maximum size  
of logs  
34 cm







# ELO M

## WHITE ENAMEL

Immerse yourself in the wonderful world of the Elo M wood-stove which promises high output and a cosy warm atmosphere. The light side of the force. The elegance and finesse of its smooth enamel front delicately balanced with the strength of its black cast-iron body.



W 500 X H 880 X D 374 mm  
Flue diameter 150 mm. Top flue.  
(Comparative tables: p116)



Heating surface  
25 to 60 m<sup>2</sup>

Power range  
3 to 7,5 kW

Optimum power  
5 kW  
= 1.6 kg wood / hour

Maximum size of logs  
33 cm



ELO M  
White enamel  
Ref. 6102-48



Heating surface  
75 to 170 m<sup>2</sup>

Power range  
9,5 to 21 kW

Optimum power  
14 kW  
= 4.6 kg wood / hour

Maximum size of logs  
50 cm



# POW-WOW

Like a totem in the living room, this large format stove celebrates the sacred spirit of fire. Its modern and ethnic lines give him an undeniable charm. Efficient by extreme cold, this all cast-iron stove can work with open doors to enjoy a traditional fire. Design: Bernard Dequet.



Anthracite  
Ref. 6152-44

H 1895 x diameter on floor 817 mm  
Flue diameter 200 mm. Top flue.  
(Comparative tables: p116)



# KAORI



Anthracite  
Ref. 6478-44

Entirely made from cast iron, this simple and modern looking stove, offers great performance. Its style and its rounded lines magnify the dancing flames. Elegant on its 4 cast iron feet, Kaori will appeal to the unconditional ones of understated charm. Design: Bernard Dequet.

W 754 X H 773 X D 404 mm  
Flue diameter 150 mm.  
Top flue or rear flue.  
(Comparative tables: p116)



Heating  
surface  
50 to 110 m<sup>2</sup>

Power  
range  
6 to 13,5 kW

Optimum  
power  
9 kW  
= 3 kg wood / hour

Maximum size  
of logs  
58 cm



# FIFTY ARCHE

Invite the spirit and creativity of happy days into your home! Inspired by the aesthetic influences of the 50's, this vintage woodstove also send you into the future through its high technological and environmental performances. Design: Jean-Philippe Dargenton.



W 922 X H 755 X D 442,5 mm  
 Flue diameter 150 mm.  
 Top flue or rear flue.  
 (Comparative tables: p116)



Anthracite  
 Ref. 6479-44



Ivory enamel  
 Ref. 6479-46



Red enamel  
 Ref. 6479-47



Heating surface  
 55 to 120 m<sup>2</sup>

---

Power range  
 6,5 to 15 kW

---

Optimum power  
 10 kW  
 = 3.3 kg wood / hour

---

Maximum size of logs  
 60 cm

Heating  
surface  
40 to 100 m<sup>2</sup>

Power  
range  
5 to 12 kW

Optimum  
power  
8 kW  
= 2.6 kg wood / hour

Maximum size  
of logs  
40 cm

# ARATOS

Aratos is drawing up the blueprint of a modern and efficiently heated house. There all is warmth and beauty. Comfort, peace and pleasure. Design: Bernard Dequet.



Anthracite  
Ref. 6453-44

W 527 X H 1050 X D 453 mm  
Flue diameter 150 mm. Top flue.  
(Comparative tables: p116)



POST  
COMBUSTION

100%  
CAST-  
IRON

5-YEAR<sup>(1)</sup>  
Warranty



# Hybrid stoves

Invicta offers a solution unique to the market combining the advantages of the two types of fuel. Logs or pellets - it's up to you. This brand new dual fuel concept functions like a classic log burner stove but also comes with a pellet hopper. You can benefit from the heat and visual effect of a wood fire when you are home and maintain a gentle temperature during the night or if you are away by using pellets. In addition, Invicta mixed log or pellet stoves mean you are free to adjust consumption according to energy price variance, opting to use logs, for example, if there is a rise in the price of pellets.

# AKIMIX

---

Master the fire and choose the most suitable fuel whenever desired. Imagine... The warmth and beauty of a log fire enliven your evenings with your family. Then, you can shift over to the pellet mode to keep a gentle temperature during the nights. Design: Bernard Dequet.

Heating surface  
40 to 85 m<sup>2</sup>

Power range pellets  
3,5 to 6,5 kW

Optimum power logs  
7 kW  
= 2.3 kg wood / hour

Maximum size of logs  
38 cm

W 766 X H 851 X D 372 mm  
Flue diameter 150 mm. Top flue or rear flue.  
(Comparative tables: p117)



Anthracite  
Ref. 6190-44









Heating surface  
30 to 70 m<sup>2</sup>

Power range pellets  
2,5 to 6,5 kW

Optimum power logs  
6 kW  
= 2 kg wood / hour

Maximum size of logs  
38 cm

# MIX

Master the fire! Orchestrate your heating mode by selecting the economic advantage of wood logs or convenience of pellets. Silent, this stove is easy to use and yet, plays a sweet melody of comfort. Design: Bernard Dequet.



Anthracite  
Ref. 6196-44

|                                 |  |
|---------------------------------|--|
| DUAL<br>wood logs<br>& pellets  | AIR-TIGHT<br>STOVE<br>Compatible RT 2012 |
| AIR<br>CONTROL                  | POST<br>COMBUSTION                       |
| SILENT<br>natural<br>convection | 100%<br>CAST-<br>IRON                    |
| Chamotte<br>BRICK COVER         | 5-YEAR <sup>(15)</sup><br>Warranty       |



W 805 X H 980 X D 463 mm  
Flue diameter 150 mm. Top flue.  
(Comparative tables: p117)



# CAROLO MIX

Can't decide between the benefits of a logs stove and a pellet stove? Invicta offers the Carolo Mix. This stove combines the advantages of both fuels. Simple to use, it switches easily from one mode to another. With a warm design, it will charm you. Design: Jean-Philippe Dargenton.

W 799 X H 690 X D 434 mm  
Flue diameter 150 mm. Top flue.  
(Comparative tables: p117)



Anthracite  
Ref. 6495-44

DUAL  
wood logs  
& pellets

POST  
COMBUSTION

SILENT  
natural  
convection

100%  
CAST-  
IRON

5-YEAR<sup>®</sup>  
Warranty

Heating  
surface  
40 to 85 m<sup>2</sup>

Power  
range pellets  
3,5 to 6,5 kW

Optimum  
power logs  
7 kW  
= 2.3 kg wood / hour

Maximum size  
of logs  
35 cm



# Ductable stoves

The ductable wood stove provides incredible thermal comfort in your home. It does not suck the air from the room where it is located, but receives it from the outside or a crawl space via a fresh air intake located on the bottom of the stove. Ideal for low energy houses, it can achieve significant energy savings, and thus reduce, significantly, your heating bills.





# ALTARA +

Elegant and flamboyant, the Altara + is dressed to impress. With its stainless steel handle and refractory concrete brick side, it will shine in any living room. Design: Bernard Dequet.



Altara

Chamotte  
BRICK COVER



Altara +

refractory  
CONCRETE  
BRICKS

W 450 X H 1650 X D 450 mm  
Flue diameter 150 mm. Top flue.  
(Comparative tables: p117)



|  |
|--|
| <p>Heating surface<br/>40 to 85 m<sup>2</sup></p>      |
| <p>Power range<br/>4,5 to 10,5 kW</p>                  |
| <p>Optimum power<br/>7 kW<br/>= 2.3 kg wood / hour</p> |
| <p>Maximum size of logs<br/>33 cm</p>                  |



Altara  
Anthracite  
Ref. 6103-44



Altara +  
Anthracite  
Ref. 6103-14





EASILY  
ACCESSIBLE  
HANDLE





Heating surface  
30 to 70 m<sup>2</sup>

Power range  
4 to 9 kW

Optimum power  
6 kW  
= 2 kg wood / hour

Maximum size of logs  
33 cm

# ALCANDE

Beautiful panorama, unique experience of comfort, warm moments... Now boarding to pleasure and comfort of wood heating. Design: Bernard Dequet.



Anthracite  
Ref. 6109-44

W 450 X H 1200 X D 482,5 mm  
Flue diameter 150 mm. Top flue.  
(Comparative tables: p117)





# ALCOR

●  
Anthracite  
Ref. 6107-44

Alcor promises you a bright future. Its full panoramic glass and elegant design give an undeniable brilliance to the fire show. Design: Bernard Dequet.

W 450 X H 1200 X D 450 mm  
Flue diameter 150 mm. Top flue.  
(Comparative tables: p117)



Heating surface  
30 to 70 m<sup>2</sup>

Power range  
4 to 9 kW

Optimum power  
6 kW  
= 2 kg wood / hour

Maximum size of logs  
33 cm





Heating surface  
40 to 100 m<sup>2</sup>

Power range  
5 to 12 kW

Optimum power  
8 kW  
= 2.6 kg wood / hour

Maximum size of logs  
30 cm

# ÎLOT

With its amazing look, Îlot is perfect to create a relaxing and cozy atmosphere with subdued lighting. In addition to a mesmerizing fire, Îlot offers very high environmental performances with low emissions. Design: Arnaud Lapierre.



Anthracite  
Ref. 6169-44

W 613 X H 716 X D 619 mm  
Flue diameter 150 mm. Rear flue.  
(Comparative tables: p117)



# WABI

The chic Wabi stove cheers you up during the cold season and brings to your home a modern touch with soothing effects. Design: Bernard Dequet.



W 400 X H 1120 X D 400 mm  
 Flue diameter 150 mm.  
 Top flue or rear flue.  
 (Comparative tables: p117)



Heating surface  
 30 to 70 m<sup>2</sup>

Power range  
 4 to 9 kW

Optimum power  
 6 kW  
 = 2 kg wood / hour

Maximum size of logs  
 30 cm



Anthracite  
 Ref. 6122-44



# RÉVA

Magical mirror! Réva wood stove adds a touch of instant style by reflecting light. With a fire inside, the mirror no longer reflects and reveals the beauty of the flames. Come to the other side of the mirror and discover Réva's technological and energetic powers. Design: Bernard Dequet.



Bench option. Ref. 6961-31

W 540 X H 620 X D 408 mm  
 Flue diameter 150 mm.  
 Top flue or rear flue.  
 (Comparative tables: p118)



Heating surface  
 25 to 60 m<sup>2</sup>

Power range  
 3 to 7,5 kW

Optimum power  
 5 kW  
 = 1.6 kg wood / hour

Maximum size of logs  
 37 cm



Anthracite  
 Ref. 6131-04





Heating surface  
40 to 100 m<sup>2</sup>

Power range  
5 to 12 kW

Optimum power  
8 kW  
= 2.6 kg wood / hour

Maximum size of logs  
38 cm

# ORENSE

Harmonious and subtle design. The seductive Orense stove let us see generous shapes and gracious curves. State of the art stove, Orense is the perfect harmony between design and functionality. Design: Jean-Philippe Dargent.

Finish chrome handles



Anthracite  
Ref. 6194-44



Chrome handles  
Ref. 6194-48

W 550 X H 1000 X D 590 mm  
Flue diameter 150 mm.  
Top flue or rear flue.  
(Comparative tables: p118)



AIR-TIGHT STOVE  
Compatible RT 2012

AIR CONTROL

POST COMBUSTION

100% CAST-IRON

5-YEAR<sup>(13)</sup> Warranty

# MOAÏ

Inspired by the outline of the Easter Island statues, Moaï wood stove and its angular glass offer a magnificent view of the flames. According to the tradition, each Moaï is responsible for the part of the world he is looking at. This cast-iron god protects every home from the outside cold thanks to its technical features and its beautiful energetic and environmental performances. Design: Bernard Dequet.

W 560 X H 1439 X D 457 mm

Flue diameter 180 mm.

Top flue or rear flue.

(Comparative tables: p118)



Anthracite  
Ref. 6142-44




Heating surface  
40 to 100 m<sup>2</sup>

Power range  
5 to 12 kW

Optimum power  
8 kW  
= 2.6 kg wood / hour

Maximum size of logs  
35 cm



# MANA

Slender version of the Moaï stove, the Mana diffuses positive energy in every home. Beyond its spiritual and aesthetic strength, Mana brings together an anthology of technical and energetic qualities. Design: Bernard Dequet.

W 560 X H 1883 X D 457 mm

Flue diameter 180 mm.

Top flue or rear flue.

(Comparative tables: p118)



Anthracite  
Ref. 6143-44



Heating surface  
40 to 100 m<sup>2</sup>

Power range  
5 to 12 kW

Optimum power  
8 kW  
= 2.6 kg wood / hour

Maximum size of logs  
35 cm





# ELO S

Welcome to the world of Elo!  
 Elo S is compact and highly efficient, designed to fit comfortably into an existing fireplace.



Heating surface  
 25 to 60 m<sup>2</sup>

Power range  
 3 to 7,5 kW

Optimum power  
 5 kW  
 = 1.6 kg wood / hour

Maximum size of logs  
 33 cm

W 513 X H 720 X D 374 mm  
 Flue diameter 150 mm. Top flue.  
 (Comparative tables: p118)



  
 ELO S  
 Anthracite  
 Ref. 6102-14



# ELO L

Welcome to the warm and comfortable world of Elo! With efficient performance and futuristic design, the Elo wood-stove will transport you to the heights of comfort and satisfaction.



Heating surface  
 25 to 60 m<sup>2</sup>

Power range  
 3 to 7,5 kW

Optimum power  
 5 kW  
 = 1.6 kg wood / hour

Maximum size of logs  
 33 cm

W 500 X H 920 X D 374 mm  
 Flue diameter 150 mm. Top flue.  
 (Comparative tables: p118)



  
 ELO L  
 Anthracite  
 Ref. 6102-44



# Cast iron stoves

With excellent thermal conductivity and high inertia: the cast iron is the ideal material for heating appliances. The heat developed by the combustion of the wood is stored by the cast iron, and restored to the homes in the best possible manner thanks to the regularity of emission. Its excellent castability gives it that famous peach skin or velvety finish. This material is 100% recyclable. Invicta cast iron stoves are decorative objects in their own right, and are equally appropriate in a rustic or contemporary interior. Finally, beyond their robust appearance, they demonstrate incredible longevity.









Heating surface  
40 to 85 m<sup>2</sup>

Power range  
4,5 to 10,5 kW

Optimum power  
7 kW  
= 2.3 kg wood / hour

Maximum size of logs  
34 cm

# IWAKI

Zen attitude... Iwaki breathes harmony and serenity to your home. Feel all the positive energy that emerges from this well-proportioned stove. Design: Bernard Dequet.



Anthracite  
Ref. 6106-44

W 372 X H 883 X D 394 mm  
Flue diameter 150 mm.  
Top flue or rear flue.  
(Comparative tables: p118)



# IWAKI ON BASE

## WITH SIDE GLASSES

Iwaki climbs up a notch and sits on a solid stand. It seeks and finds an opening, offering a 180° view of the flames. In short, it adds volumes to your heating experience. Design: Bernard Dequet.

W 360 X H 1023 X D 372 mm

Flue diameter 150 mm.

Top flue or rear flue.

(Comparative tables: p119)



Heating surface  
40 to 85 m<sup>2</sup>

Power range  
4,5 to 10,5 kW

Optimum power  
7 kW  
= 2.3 kg wood / hour

Maximum size of logs  
34 cm



  
Anthracite  
Ref. 6106-24

# OKINO

Warm yourself in peace and enjoy the harmonious atmosphere created by this Japanese inspiration stove.

Design: Bernard Dequet

W 402 X H 891 X D 402 mm

Flue diameter 150 mm. Top flue.

(Comparative tables: p119)




Heating surface  
40 to 85 m<sup>2</sup>

Power range  
4,5 to 10,5 kW

Optimum power  
7 kW  
= 2.3 kg wood / hour

Maximum size of logs  
34 cm




  
Anthracite  
Ref. 6105-44

# SEDAN S

The little newcomer ! Classic and timeless, the Sedan S has just as much to offer as the larger ones and easily fits in your home. Design: Jean-Philippe Dargenton.



W 500 X H 627 X D 443 mm  
 Flue diameter 150 mm. Top flue.  
 (Comparative tables: p119)



Heating surface  
25 to 60 m<sup>2</sup>

Power range  
3 to 7,5 kW

Optimum power  
5 kW  
= 1.6 kg wood / hour

Maximum size of logs  
30 cm



Heating surface  
30 to 75 m<sup>2</sup>

Power range  
4 to 9 kW

Optimum power  
6 kW  
= 2 kg wood / hour

Maximum size of logs  
50 cm



# NORIK

Set-up a paradise area and give in to the delights and wellness provided by this very modern stove, Norik. Design: Jean-Philippe Dargent.



Anthracite  
Ref. 9121-44

W 620 X H 674 X D 465 mm  
Flue diameter 150 mm.  
Top flue or rear flue.  
(Comparative tables: p119)





Heating  
surface  
55 to 120 m<sup>2</sup>

Power  
range  
6,5 to 15 kW

Optimum  
power  
10 kW  
= 3.3 kg wood / hour

Maximum size  
of logs  
40 cm

# LUDIA

The curtain rises on a magnificent scene starring the dancing flames. Ludia, a high-performance actor of your heating scenario, attracts admiring gazes with its original cast iron sculptured look. Design: Jean-Philippe Dargenton.



Anthracite  
Ref. 6123-44

W 536 X H 1035 X D 437 mm  
Flue diameter 150 mm. Top flue.  
(Comparative tables: p119)



# MANDRA

## DESIGNED FOR FIREPLACES

Imagine this compact cast-iron stove directly installed in your fireplace. Thanks to this updated wood-heating classical, you enjoy a cosy warmth and a fascinating view of the fire. Design: Bernard Dequet.



W 624 X H 920 X D 408 mm  
Flue diameter 150 mm. Rear flue.  
(Comparative tables: p119)



Heating surface  
25 to 60 m<sup>2</sup>

Power range  
3 to 7,5 kW

Optimum power  
5 kW  
= 1.6 kg wood / hour

Maximum size of logs  
32 cm



# TENNESSEE

---

We all have a space for Tennessee wood stove at home. Its retro-style is modernized with trendy stainless steel trims. The enamelled versions, pure white, elegant black or exuberant red, will harmonize with all interior decorating ideas. Design: Bernard Dequet.

## AUTOMATIC AIR REGULATION SYSTEM

This electricity-free mechanical system regulates air intake and fuel combustion according to the setting on the control knob at the side.



W 780 X H 798 X D 428 mm

Flue diameter 180 mm. Top flue or rear flue.

(Comparative tables: p119)



ISO 14001 CERTIFIED



White enamel  
Ref. 6181-48



Anthracite  
Ref. 6181-44



Red enamel  
Ref. 6181-47



Black enamel  
Ref. 6181-43







AUTOMATIC AIR  
REGULATION SYSTEM



Heating surface  
40 to 100 m<sup>2</sup>

Power range  
5 to 12 kW

Optimum power  
8 kW  
= 2.6 kg wood / hour

Maximum size of logs  
56 cm

# CAROLO



Anthracite  
Ref. 9162-44

Appropriately named, this cast iron stove proudly displays its French Ardennes origins. It invites you to discover magnificent flaming views and unparalleled heat. Feel free to take advantage of its generous energy performance. Design: Jean-Philippe Dargent.

W 620 X H 690 X D 439 mm  
Flue diameter 150 mm.  
Top flue or rear flue.  
(Comparative tables: p119)



# LA BORNE 2

This new version of La Borne, more efficient, has a post-combustion system. La Borne brilliantly leads the way to an efficient and joyous wood heating experience. Design: INVICTA création.



Heating surface  
40 to 85 m<sup>2</sup>

Power range  
4,5 to 10,5 kW

Optimum power  
7 kW  
= 2.3 kg wood / hour

Maximum size of logs  
45 cm

W 548 X H 719 X D 400 mm  
Flue diameter 150 mm. Top flue.  
(Comparative tables: p119)



Anthracite  
Ref. 6454-44

# SOREL

Sorel, a timeless and efficient stove is available in several colours and will transport you back in time with its retro look. Design: Jean-Philippe Dargenton.



Heating surface  
40 to 100 m<sup>2</sup>

Power range  
5 to 12 kW

Optimum power  
8 kW  
= 2.6 kg wood / hour

Maximum size of logs  
65 cm

W 417 X H 1055 X D 517,5 mm  
Flue diameter 97 mm. Rear flue.  
(Comparative tables: p120)



Specific colours on demand.



Anthracite  
Ref. 6198-44



Ivory enamel  
Ref. 6198-46



Blue enamel  
Ref. 6198-42



Pink



Yellow



Apple green



Bora



Orange



Red



Grey

# CHÂTEL

Very efficient and compact, the Chatel stove is at home in all types of interior. Design: Jean-Philippe Dargenton.

W 476 X H 830 X D 375 mm  
Flue diameter 150 mm. Top flue.  
(Comparative tables: p120)



Anthracite  
Ref. 6137-44



Heating surface  
40 to 100 m<sup>2</sup>

Power range  
5 to 12 kW

Optimum power  
8 kW  
= 2.6 kg wood / hour

Maximum size of logs  
34 cm



100% CAST-IRON  
5-YEAR<sup>™</sup> Warranty

# MESNIL

Despite its small size, Mesnil elevates itself with its pedestal and high energy performance. Design: Jean-Philippe Dargenton.

W 486,5 X H 986 X D 385 mm  
Flue diameter 150 mm. Top flue.  
(Comparative tables: p120)



Anthracite  
Ref. 6136-44



Heating surface  
40 to 100 m<sup>2</sup>

Power range  
5 to 12 kW

Optimum power  
8 kW  
= 2.6 kg wood / hour

Maximum size of logs  
34 cm



100% CAST-IRON  
5-YEAR<sup>™</sup> Warranty

# SAMARA

This cast iron stove is small, fitting into any interior with its classic style and tiny footprint. Design: Jean-Philippe Dargent.



Heating surface  
30 to 70 m<sup>2</sup>

Power range  
4 to 9 kW

Optimum power  
6 kW  
= 2 kg wood / hour

Maximum size of logs  
50 cm

W 634 X H 644 X D 462 mm

Flue diameter 150 mm.

Top flue or rear flue.

(Comparative tables: p120)



Anthracite  
Ref. 9148-44



# ALTÉA

Welcome to the fire corner! This classic stove has received a makeover. Now equipped with a post combustion system, Altea offers excellent thermal and environmental performance. Design: Jean-Philippe Dargent.



Heating surface  
40 to 100 m<sup>2</sup>

Power range  
5 to 12 kW

Optimum power  
8 kW  
= 2.6 kg wood / hour

Maximum size of logs  
50 cm

W 644 X H 744 X D 556 mm

Flue diameter 150 mm.

Top flue or rear flue.

(Comparative tables: p120)



Anthracite  
Ref. 9166-44



# KAZAN

---

Directly inspired by the thermal efficiency of cast iron radiators, Kazan combines design and performance. Its fins give this stove a unique and stylish look, while enhancing energy performance with an increased heat exchange surface area. Design: Bernard Dequet.

W 652 X H 801 X D 372 mm

Flue diameter 150 mm.

Top flue or rear flue.

(Comparative tables: p120)



Anthracite  
Ref. 6104-44



Heating surface  
50 to 110 m<sup>2</sup>

---

Power range  
6 to 13,5 kW

---

Optimum power  
9 kW  
= 3 kg wood / hour

---

Maximum size of logs  
58 cm

Heating  
surface  
50 to 110 m<sup>2</sup>

Power  
range  
6 to 13,5 kW

Optimum  
power  
9 kW  
= 3 kg wood / hour

Maximum size  
of logs  
58 cm



# KAZAN GA

This 100% cast iron stove, enhanced by its graphic lines and large glass surface offers a wide angle view. Kazan GA gives pride of place to the beauty of fire. Its design and performance won't fail to bring a warm atmosphere into your home. Design: Bernard Dequet.



Anthracite  
Ref. 6104-43

W 652 X H 801 X D 372 mm  
Flue diameter 150 mm.  
Top flue or rear flue.  
(Comparative tables: p120)





Heating surface  
65 to 145 m<sup>2</sup>

Power range  
8 to 18 kW

Optimum power  
12 kW  
= 4 kg wood / hour

Maximum size of logs  
60 cm

# SIAM

A sober and elegant stove that delivers powerful performance. Its retro, yet sleek look will seduce traditional stove lovers. Design: Bernard Dequet.



Anthracite  
Ref. 9170-44

W 700 X H 803 X D 451 mm  
Flue diameter 150 mm.  
Top flue or rear flue.  
(Comparative tables: p121)





# SEDAN L

## SIDE LOADING

The retro style of the Sedan L wood stove fits perfectly in a warm and friendly setting. As for convenience, it can be loaded with logs from the side. Design: Jean-Philippe Dargenton.

W 766 X H 770 X D 523 mm

Flue diameter 180 mm.

Top flue or rear flue.

(Comparative tables: p121)



Heating surface  
65 to 145 m<sup>2</sup>

Power range  
8 to 18 kW

Optimum power  
12 kW  
= 4 kg wood / hour

Maximum size of logs  
60 cm




Anthracite  
Ref. 9172-44



Ivory enamel  
Ref. 9172-46



Grey enamel  
Ref. 9172-48



# SEDAN M

## SIDE LOADING

Classic and timeless with its side loading feature, the Sedan M stove renews itself in trendy enamelled colours. Design: Jean-Philippe Dargenton.

W 644 X H 701 X D 463 mm

Flue diameter 150 mm.

Top flue or rear flue.

(Comparative tables: p121)



Heating surface  
55 to 120 m<sup>2</sup>

Power range  
6,5 to 15 kW

Optimum power  
10 kW  
= 3.3 kg wood / hour

Maximum size of logs  
42 cm



Anthracite  
Ref. 9160-44




Ivory enamel  
Ref. 9160-46



Red enamel  
Ref. 9160-47



Grey enamel  
Ref. 9160-48



# RÉGENT

The traditional look of this stove creates a feel-good atmosphere in your room. Design: Jean-Philippe Dargenton.



W 764 X H 736 X D 480 mm  
 Flue diameter 150 mm.  
 Top flue or rear flue.  
 (Comparative tables: p121)

Heating surface  
 55 to 120 m<sup>2</sup>

Power range  
 6,5 to 15 kW

Optimum power  
 10 kW  
 = 3.3 kg wood / hour

Maximum size of logs  
 50 cm



Anthracite  
 Ref. 9174-44



# MAIRY

This all cast-iron stove launch yourself with ardor into an universe of comfort and energetic performance. Design: Jean-Philippe Dargenton.



W 524 X H 1098 X D 426,5 mm  
 Flue diameter 150 mm. Top flue.  
 (Comparative tables: p121)

Heating surface  
 55 to 120 m<sup>2</sup>

Power range  
 6,5 to 15 kW

Optimum power  
 10 kW  
 = 3.3 kg wood / hour

Maximum size of logs  
 40 cm



Anthracite  
 Ref. 6145-44



# CASSINE

Its simple design and vertical lines make the Cassine an indispensable stove to pleasantly warm your home. Design: Jean-Philippe Dargenton.



Anthracite  
Ref. 6147-44

W 513 X H 977 X D 415 mm  
Flue diameter 150 mm. Top flue.  
(Comparative tables: p121)



Heating surface  
55 to 120 m<sup>2</sup>

Power range  
6,5 to 15 kW

Optimum power  
10 kW  
= 3.3 kg wood / hour

Maximum size of logs  
40 cm





Heating surface  
50 to 110 m<sup>2</sup>

---

Power range  
6 to 13,5 kW

---

Optimum power  
9 kW  
= 3 kg wood / hour

---

Maximum size of logs  
54 cm

# BRADFORD

With its classical and modern lines, Bradford reveals a timeless style without a blush. It melts into your interior in anthracite or enamelled ivory color, or distinguishes itself with its dynamic red enamel color.



W 730 X H 690 X D 613 mm  
Flue diameter 150 mm.  
Top flue or rear flue.  
(Comparative tables: p121)

made in  
france  
ISO 14001 CERTIFIED



Anthracite  
Ref. 9173-44



Ivory enamel  
Ref. 9173-46



Red enamel  
Ref. 9173-47

POST  
COMBUSTION

100%  
CAST-  
IRON

5-YEAR<sup>15</sup>  
Warranty

# MODENA

This wood stove with a retro spirit fits perfectly in a warm and friendly context. Beyond its energy and environmental performance, Modena impresses with its wide range of enamel colours: red, yellow, ivory, and a very trendy grey. Design: Jean-Philippe Dargent.



Anthracite  
Ref. 9175-44

Ivory enamel  
Ref. 9175-46

Grey enamel  
Ref. 9175-48

Red enamel  
Ref. 9175-47

Yellow enamel  
Ref. 9175-45

W 764 X H 741 X D 508 mm  
Flue diameter 150 mm.  
Top flue or rear flue.  
(Comparative tables: p121)

made in  
france  
ISO 14001 CERTIFIED



POST  
COMBUSTION

100%  
CAST-  
IRON

5-YEAR<sup>(10)</sup>  
Warranty

Heating  
surface  
55 to 120 m<sup>2</sup>

Power  
range  
6,5 to 15 kW

Optimum  
power  
10 kW  
= 3.3 kg wood / hour

Maximum size  
of logs  
50 cm



# FIFTY ON PEDESTAL

The spirit of fantasy and joy are invited in your home with this vintage wood stove, available in several colours. Inspired by the aesthetic of the 50s, Fifty arche also transports you to the future thanks to high performance. Design: Jean-Philippe Dargenton.

Heating surface  
55 to 120 m<sup>2</sup>

Power range  
6,5 to 15 kW

Optimum power  
10 kW  
= 3.3 kg wood / hour

Maximum size of logs  
60 cm



W 922 X H 850 X D 442 mm  
Flue diameter 150 mm. Top flue or rear flue.  
(Comparative tables: p121)



ISO 14001 CERTIFIED



Anthracite  
Ref. 6480-44



Ivory enamel door  
Ref. 6480-46



Red enamel door  
Ref. 6480-47







Heating surface  
55 to 120 m<sup>2</sup>

---

Power range  
6,5 to 15 kW

---

Optimum power  
10 kW  
= 3.3 kg wood / hour

---

Maximum size of logs  
40 cm

# TIPI

The great and sacred spirit of fire emanates from this stove. Its design is widely inspired by the traditional house of native Americans. Simple and slender, this all-cast iron stove works perfectly with doors opened to celebrate the cult of the fire. During cold days, the Tipi is a tremendous renewable source of heat. Design: Bernard Dequet.



Anthracite  
Ref. 6153-44

W 1585 X diameter on floor 754 mm  
Flue diameter 200 mm. Top flue.  
(Comparative tables: p122)





# CHAMANE 10

Excellent performance for this stove soberly dressed in anthracite; that takes up minimal space, showing a maximum of fire! Its elongated lines and balanced dimensions highlight its innovative design. Design: Bernard Dequet.

W 560 X H 1200 X D 578 mm  
Flue diameter 180 mm. Top flue.  
(Comparative tables: p.122)  
Available in 14 kW version p.89



Anthracite  
Ref. 6156-14



Heating surface  
55 to 120 m<sup>2</sup>

Power range  
6,5 to 15 kW

Optimum power  
10 kW  
= 3.3 kg wood / hour

Maximum size of logs  
40 cm



# SÉVILLE 2

Enamelled or anthracite, the Seville stove brings a touch of aestheticism your home and gives your room a warm and cosy character. Design: Jean-Philippe Dargenton.

Heating surface  
40 to 85 m<sup>2</sup>

Power range  
4,5 to 10,5 kW

Optimum power  
7 kW  
= 2.3 kg wood / hour

Maximum size of logs  
40 cm



W 560 X H 692 X D 462,5 mm  
Flue diameter 150 mm. Top flue.  
(Comparative tables: p122)



ISO 14001 CERTIFIED

flamme  
VERTE

Le label  
du chauffage  
au bois



Anthracite  
Ref. 6192-44



Ivory enamel  
Ref. 6192-46



Red enamel  
Ref. 6192-47







Heating surface  
55 to 120 m<sup>2</sup>

Power range  
6,5 to 15 kW

Optimum power  
10 kW  
= 3.3 kg wood / hour

Maximum size of logs  
33 cm

# OVE

Do you feel like lounging around a fire or curling up on your couch ? Ove is perfect to create a cozy corner in your home. Irresistible design, power of seduction, Ove also offers high performances and cares of the environment. Design: Bernard Dequet.



Anthracite  
Ref. 6149-44

H 1310 X diameter on floor 550 mm  
Flue diameter 180 mm. Top flue.  
(Comparative tables: p122)






# LUNA

Welcome to a universe of high energetic performance ! With its 3 stylish-formed feet Luna seeks to heat all living spaces. Design: Bernard Dequet.



W 833 X H 810 X D 457 mm  
 Flue diameter 180 mm.  
 Top flue or rear flue.  
 (Comparative tables: p122)



-  Black enamel  
Ref. 6182-43
-  Ivory enamel  
Ref. 6182-46
-  Anthracite  
Ref. 6182-44
-  Red enamel  
Ref. 6182-47



Heating surface  
 55 to 120 m<sup>2</sup>

---

Power range  
 6,5 to 15 kW

---

Optimum power  
 10 kW  
 = 3.3 kg wood / hour

---

Maximum size of logs  
 52 cm

# ANTAYA

---

Allow yourself to be captivated by the magic of Antaya. This wide screen stove brings amazing performance and style. Design: Bernard Dequet.

W 1051 X H 899 X D 480 mm

Flue diameter 180 mm.

Top flue or rear flue.

(Comparative tables: p122)



Anthracite  
Ref. 6114-44



Heating surface  
65 to 145 m<sup>2</sup>

Power range  
8 to 18 kW

Optimum power  
12 kW  
= 4 kg wood / hour

Maximum size of logs  
71 cm

Heating  
surface  
65 to 145 m<sup>2</sup>

Power  
range  
8 to 18 kW

Optimum  
power  
12 kW  
= 4 kg wood / hour

Maximum size  
of logs  
71 cm



# THÉIA

Flamboyant actor, Théia stove delivers an original interpretation of the dance of fire in your home. Design: Bernard Dequet.

W 1034 X H 913 X D 491 mm  
Flue diameter 180 mm.  
Top flue or rear flue.  
(Comparative tables: p122)

made in  
france  
ISO 14001 CERTIFIED



Anthracite  
Ref. 6113-44

POST  
COMBUSTION

100%  
CAST-  
IRON

5-YEAR<sup>(13)</sup>  
Warranty

# GAYA ARDOISE

Sink into your armchair and enjoy the great show displayed by the stove Gaya ardoise. Design: Bernard Dequet.

W 1200 X H 1143 X D 503 mm  
 Flue diameter 180 mm.  
 Top flue or rear flue.  
 (Comparative tables: p123)



Anthracite  
 Ref. 6117-44



Heating surface  
 65 to 145 m<sup>2</sup>

Power range  
 8 to 18 kW

Optimum power  
 12 kW  
 = 4 kg wood / hour

Maximum size of logs  
 71 cm



# AKAN

Thanks to Akan stove, have an appointment with relaxation and serenity. The decorative doors capture the light. Design: Bernard Dequet.

W 1034 X H 913 X D 491 mm  
 Flue diameter 180 mm.  
 Top flue or rear flue.  
 (Comparative tables: p122)



Anthracite  
 Ref. 6111-44



Heating surface  
 65 to 145 m<sup>2</sup>

Power range  
 8 to 18 kW

Optimum power  
 12 kW  
 = 4 kg wood / hour

Maximum size of logs  
 71 cm





# ITAYA

An exceptional design, the Itaya stove creates a unique and warm atmosphere in your home.  
Design: Bernard Dequet.



Heating surface  
65 to 145 m<sup>2</sup>

Power range  
8 to 18 kW

Optimum power  
12 kW  
= 4 kg wood / hour

Maximum size of logs  
71 cm

W 1051 X H 846 X D 431 mm  
Flue diameter 180 mm.  
Top flue or rear flue.  
(Comparative tables: p123)



Anthracite  
Ref. 6110-44



# SYMPHONIA

Indulge your senses with Symphonia. The hypnotic dance of the flames will extend on the decorative doors of the wood stove. An authentic design which also demonstrates high performances. Design: Bernard Dequet.



Heating surface  
65 to 145 m<sup>2</sup>

Power range  
8 to 18 kW

Optimum power  
12 kW  
= 4 kg wood / hour

Maximum size of logs  
71 cm

W 1034 X H 913 X D 491 mm  
Flue diameter 180 mm.  
Top flue or rear flue.  
(Comparative tables: p123)



Anthracite  
Ref. 6115-44



# ONYX

---

A distinctive design in harmony with materials. The white steel surround contrasts with the natural and mineral aspect of the anthracite cast-iron. Onyx can handle large logs and offers a fantastic view of the fire. Design: Bernard Dequet.



W 1650 X H 1150 X D 537 mm  
Flue diameter 180 mm. Top flue or rear flue.  
(Comparative tables: p123)

Heating  
surface  
65 to 145 m<sup>2</sup>


Power  
range  
8 to 18 kW

Optimum  
power  
12 kW  
= 4 kg wood / hour

Maximum size  
of logs  
71 cm



Steel surround  
White epoxy  
Ref. 6120-46







Heating  
surface  
65 to 145 m<sup>2</sup>

Power  
range  
8 to 18 kW

Optimum  
power  
12 kW  
= 4 kg wood / hour

Maximum size  
of logs  
80 cm

# NELSON

## DOUBLE SIDED VIEW

This double sided stove gives a unique character to your home. Pleasant evenings ahead, at each side of the stove, the rhythm of the crackling fire and dance of the flames are now unmissable. Design: Jean-Philippe Dargent

W 910 X H 955 X D 480 mm  
Flue diameter 180 mm. Top flue.  
(Comparative tables: p123)



Anthracite  
Ref. 6129-44



# AARON

## DOUBLE SIDED VIEW

You no longer need to choose one side or the other. Aaron stove offers a double sided view of the fire. Placed directly on natural material such as stone or a bench, offered as an option, this wide vision welcomes large logs. Design: Jean-Philippe Dargent.



Bench option. Ref. 6961-31  
W 1000 x H 450 x D 550 mm



Bench option. Ref. 6961-28  
W 1600 x H 450 x D 550 mm

W 910 X H 635 X D 481 mm  
Flue diameter 180 mm. Top flue.  
(Comparative tables: p123)



Anthracite  
Ref. 6129-04

100%  
CAST-  
IRON

5-YEAR<sup>10</sup>  
Warranty

Heating  
surface  
65 to 145 m<sup>2</sup>

Power  
range  
8 to 18 kW

Optimum  
power  
12 kW  
= 4 kg wood / hour

Maximum size  
of logs  
80 cm



# ELTON

Simple, modern, Elton is an efficient stove. It offers a perfect view of the fascinating interplay of flames and welcomes large logs. Design: Jean-Philippe Dargent.

W 910 X H 956 X D 480 mm  
Flue diameter 180 mm.  
Top flue or rear flue.  
(Comparative tables: p123)



Anthracite  
Ref. 6127-44



Heating surface  
75 to 170 m<sup>2</sup>

Power range  
9,5 to 21 kW

Optimum power  
14 kW  
= 4.6 kg wood / hour

Maximum size of logs  
80 cm

Heating  
surface  
75 to 170 m<sup>2</sup>

Power  
range  
9,5 to 21 kW

Optimum  
power  
14 kW  
= 4.6 kg wood / hour

Maximum size  
of logs  
80 cm



# PRESTON

The Preston stove displays modernity and simplicity. With its rectangular shape, it can easily be placed on a stone surface or on one of the two optional black steel benches. Design: Jean-Philippe Dargent.



Bench option. Ref. 6961-31  
W 1000 x H 450 x D 550 mm



Bench option. Ref. 6961-28  
W 1600 x H 450 x D 550 mm

W 910 X H 636 X D 468 mm

Flue diameter 180 mm.

Top flue or rear flue.

(Comparative tables: p123)

made in  
france  
ISO 14001 CERTIFIED



Anthracite  
Ref. 6128-04

POST  
COMBUSTION

100%  
CAST-  
IRON

5-YEAR<sup>(18)</sup>  
Warranty



Heating surface  
55 to 120 m<sup>2</sup>

Power range  
6,5 to 15 kW

Optimum power  
10 kW  
= 3.3 kg wood / hour

Maximum size of logs  
44 cm

# PRÉSAGE 10

Allow yourself to be captivated by Presage stove. Its decorative door enhances the magic dimension of the flames. On air : viewing pleasure and maximum confort. Design: Bernard Dequet.



Anthracite  
Ref. 9159-44

W 560 X H 1200 X D 578 mm  
Flue diameter 180 mm. Top flue.  
(Comparative tables: p123)





# ORACLE 10

Behind its decorative facade, Oracle hides its true colours and displays excellent efficiency. We predict a future of comfort and high performance. Design: Bernard Dequet.




Heating surface  
55 to 120 m<sup>2</sup>

Power range  
6,5 to 15 kW

Optimum power  
10 kW  
= 3.3 kg wood / hour

Maximum size of logs  
44 cm

W 560 X H 1200 X D 578 mm  
Flue diameter 180 mm. Top flue.  
(Comparative tables: p123)



Anthracite  
Ref. 9157-44

# CHAMANE 14

Chamane takes up minimal space but offers plenty of fire! Its elongated lines and balanced proportions highlight its innovative design. Design: Bernard Dequet.




Heating surface  
75 to 170 m<sup>2</sup>

Power range  
9,5 to 21 kW

Optimum power  
14 kW  
= 4.6 kg wood / hour

Maximum size of logs  
44 cm

W 560 X H 1200 X D 578 mm  
Diamètre buse 180 mm. Top flue.  
(Comparative tables: p124)  
Available in 10 kW version p.73



Anthracite  
Ref. 6156-44



Heating surface  
65 to 145 m<sup>2</sup>

Power range  
8 to 18 kW

Optimum power  
12 kW  
= 4 kg wood / hour

Maximum size of logs  
40 cm

# PHAROS 360°

Flagship product from Invicta's range, Pharos opens the way to a modern and warm house. Follow the light and discover all the benefits of this swivelling stove. Design: Bernard Dequet.



Anthracite  
Ref. 9150-44

W 531.5 X H 1240,5 X D 530 mm  
Flue diameter 180 mm. Top flue.  
(Comparative tables: p124)

Also available in a fixed version: Alios Ref. 9150-24.



# ARGOS



Anthracite  
Ref. 9151-44

State of the art stove with post-combustion technology, Argos opens a bright way to efficient and pleasant wood heating. Design: Bernard Dequet.

W 532 X H 1250 X D 444 mm  
Flue diameter 180 mm. Top flue.  
(Comparative tables: p124)



Heating  
surface  
65 to 145 m<sup>2</sup>

Power  
range  
8 to 18 kW

Optimum  
power  
12 kW  
= 4 kg wood / hour

Maximum size  
of logs  
40 cm





Heating surface  
65 to 145 m<sup>2</sup>

Power range  
8 to 18 kW

Optimum power  
12 kW  
= 4 kg wood / hour

Maximum size of logs  
60 cm

# MANDOR

Solid cast-iron, this simple and modern looking stove, offers fantastic performance. Its style and its rounded lines embellish the flame show. Elegant on its 4 cast iron feet, Mandor will seduce lovers of stoves with that discreet charm. Design: Bernard Dequet.



Anthracite  
Ref. 9180-44

W 852 X H 770 X D 492 mm  
Flue diameter 150 mm.  
Top flue or rear flue.  
(Comparative tables: p124)



# ANGOR

The rounded forms of Angor wood stove seduce those who are seeking generous and efficient wood heating. Design: Bernard Dequet.



Heating surface  
65 to 145 m<sup>2</sup>

Power range  
8 to 18 kW

Optimum power  
12 kW  
= 4 kg wood / hour

Maximum size of logs  
60 cm

W 820 X H 770 X D 471 mm

Flue diameter 150 mm.

Top flue or rear flue.

(Comparative tables: p124)



Anthracite  
Ref. 9186-44



# GOMONT

A resolutely modern stove, Gomont occupies minimal space for maximum comfort. It warms and brightens any interior. Design: Jean-Philippe Dargent.



Heating surface  
65 to 145 m<sup>2</sup>

Power range  
8 to 18 kW

Optimum power  
12 kW  
= 4 kg wood / hour

Maximum size of logs  
45 cm

W 550 X H 1130 X D 447,5 mm

Flue diameter 150 mm. Top flue.

(Comparative tables: p124)



Anthracite  
Ref. 6158-44



# Steel stoves

With excellent value for money, the Invicta steel stoves combine design and efficiency. The combustion chamber of the steel stoves is usually surrounded with panels which store the heat generated by the combustion of the logs. With their refined design, they are very trendy and blend perfectly into any interior. Invicta has launched a variety of new steel stoves.





# ONSEN

## WITH SIDE GLASSES

The Onsen allows you to admire the fascinating sight of flames from any angle. Make the most of its efficient and pleasant heat.

W 502,5 X H 1048 X D 518 mm  
Flue diameter 150 mm. Top flue.  
(Comparative tables: p125)



Black  
Ref. 6488-14



Heating  
surface

30 to 70 m<sup>2</sup>

Power  
range

4 to 9 kW

Optimum  
power

6 kW

= 2 kg wood / hour

Maximum size  
of logs

40 cm



Heating surface  
30 to 70 m<sup>2</sup>

Power range  
4 to 9 kW

Optimum power  
6 kW  
= 2 kg wood / hour

Maximum size of logs  
40 cm



# ONSEN



Black  
Ref. 6488-10

A heat source whose properties are widely recognised, Onsen envelopes you in an aura of well-being, relaxation, and comfort.



Connectable version  
Ref. 6488-11

AIR-TIGHT  
STOVE  
Compatible RT 2012

W 502,5 X H 1048 X D 518 mm  
Flue diameter 150 mm. Top flue.  
(Comparative tables: p125)



POST  
COMBUSTION

refractory  
CONCRETE  
BRICKS

5-YEAR<sup>(1)</sup>  
Warranty

# AURES

Small and large space benefit from the impressive energy performance of this compact stove, full of warmth and originality.



Heating surface  
45 to 105 m<sup>2</sup>

Power range  
5,5 to 13 kW

Optimum power  
8,5 kW  
= 2.8 kg wood / hour

Maximum size of logs  
51 cm

W 699 X H 734 X D 519 mm  
Flue diameter 150 mm. Top flue or rear flue  
(Comparative tables: p125)



Black  
Ref. 6488-00



# SKARA

A stove that blends elegance, with high-grade steel and modern technology. Its hearth has a vermiculite layer to boost its energy efficiency. Its wide-angle glass enhances the spellbinding view of the flames.



Heating surface  
40 to 85 m<sup>2</sup>

Power range  
4,5 to 10,5 kW

Optimum power  
7 kW  
= 2.3 kg wood / hour

Maximum size of logs  
27 cm

W 519 X H 1239 X D 446 mm  
Flue diameter 150 mm. Top flue or rear flue.  
(Comparative tables: p125)



Black  
Ref. 6488-35



Heating  
surface

40 to 85 m<sup>2</sup>

Power  
range

4,5 to 10,5 kW

Optimum  
power

7 kW

= 2.3 kg wood / hour

Maximum size  
of logs

35 cm



# NARVIK

With its efficient use of energy resources, Narvik fights a winning battle against the cold and transforms your home into a cosy cocoon.

W 555 X H 1360 X D 555 mm

Flue diameter 150 mm.

Top flue or rear flue.

(Comparative tables: p125)



Black  
Ref. 6488-30

POST  
COMBUSTION

AIR-TIGHT  
STOVE  
Compatible RT 2012

refractory  
CONCRETE  
BRICKS

5-YEAR<sup>(1)</sup>  
Warranty

Heating surface  
40 to 100 m<sup>2</sup>

Power range  
5 to 12 kW

Optimum power  
8 kW  
= 2.6 kg wood / hour

Maximum size of logs  
51 cm



# TANA



Black  
Ref. 6488-20

An untypical design for an elegant stove standing on a single central support.  
The panoramic glass offers a grandstand view of the flames.

W 710 X H 930 X D 510 mm  
Flue diameter 150 mm.  
Top flue or rear flue.  
(Comparative tables: p125)



POST  
COMBUSTION

refractory  
CONCRETE  
BRICKS

5-YEAR<sup>(1)</sup>  
Warranty

# TANA ON BASE

The outstandingly high performance of the Tana base-mounted stove forecasts a heatwave in your home. Prepare to curl up in front of the fire.

W 710 X H 1145 X D 510 mm

Flue diameter 150 mm.

Top flue or rear flue.

(Comparative tables: p125)



Black  
Ref. 6488-21



Heating surface  
40 to 100 m<sup>2</sup>

Power range  
5 to 12 kW

Optimum power  
8 kW  
= 2.6 kg wood / hour

Maximum size of logs  
51 cm



# TANA GA ON BASE

Take the express route to a world of comfort and pleasure. With Tana GA, enjoy the benefit of high energy performance around the splendid panorama that its wide angle glass provides.

W 710 X H 1145 X D 510 mm

Flue diameter 150 mm.

Top flue or rear flue.

(Comparative tables: p125)



Black  
Ref. 6488-22



Heating surface  
40 to 100 m<sup>2</sup>

Power range  
5 to 12 kW

Optimum power  
8 kW  
= 2.6 kg wood / hour

Maximum size of logs  
51 cm



# Pellet stoves

Automatic and easy to use, pellet stoves are becoming more common in French households. The pellet stove is different from other wood stoves because it does not use logs, but wood pellets. Modern and easy to use, it is ideal for those who want natural heat without having to store or transport logs. With the front keyboard or remote control, you just have to program it. It will stop automatically when there are no more pellets in the feed hopper. Invicta pellet stoves have been designed to limit noise levels. Extremely efficient, some pellet stoves Invicta offer efficiencies of between 80 and 95%!



Heating surface  
30 to 90 m<sup>2</sup>

Power range  
3,1 to 7,3 kW

Pellets  
Feed hopper: 15 kg



# SERINO 7



Black  
Ref. 6409-74



Grey  
Ref. 6409-78

“A stove that heats really well! But doesn't cost the earth! ”  
The Serino granules wood stove has numerous advantages: it provides high output at a very affordable cost.



W 470 X H 950 X D 560 mm  
Flue diameter 80 mm. Rear flue.  
(Comparative tables: p125)



2-YEAR<sup>(13)</sup>  
Warranty



# PHILIA 9E

Born of the union between pellet stove technology and design, the Philia offers a unique warming experience. Enjoy performance and its energy of wellbeing, while contemplating its remarkable cast iron surround.

W 472 X H 988 X D 468 mm  
 Flue diameter 80 mm. Rear flue.  
 (Comparative tables: p125)

CAST IRON  
 made in  
  
 france



Black surround  
 Cast iron and steel  
 Ref. 6420-00



Heating surface  
 40 to 110 m<sup>2</sup>

---

Power range  
 3,4 to 9 kW

---

Pellets  
 Feed hopper: 16,5 kg



# UBLO 9E

A perfect balance between technology and design, the Ublo pellet wood-stove offers a unique experience in efficient heating. Make the most of the Ublo's high performance and warm output while enjoying the striking design of its cast-iron casing.

|   |
|---|
| <p>Heating surface</p> <p>40 to 110 m<sup>2</sup></p> |
| <p>Power range</p> <p>3,4 to 9 kW</p>                 |
| <p>Pellets</p> <p>Feed hopper: 16,5 kg</p>            |



CAST IRON  
made in  
france

W 490 X H 985 X D 500 mm  
Flue diameter 80 mm. Rear flue.  
(Comparative tables: p126)



Anthracite  
Ref. 6420-01

|                                    |   |
|------------------------------------|---|
| <p>SURROUND<br/>CAST-<br/>IRON</p> | <p>2-YEAR<sup>(13)</sup><br/>Warranty</p> |
|------------------------------------|---|

# LODI 10

With its rounded shape, this pellet stove in red, black, or grey cannot fail to match your decor. It will bring a uniquely pleasant feeling of well-being to your home. Remote control supplied with the stove.



Heating surface  
35 to 120 m<sup>2</sup>

Power range  
2,5 to 10 kW

Pellets  
Feed hopper: 16,5 kg

W 585 X H 1125 X D 570 mm

Flue diameter 80 mm. Rear flue.

(Comparative tables: p126)



Black 10 kW  
Ref. 6419-74



Red 10 kW  
Ref. 6419-77



Grey 10 kW  
Ref. 6419-78



2-YEAR<sup>™</sup>  
Warranty

# LODI 7



Heating surface  
25 to 85 m<sup>2</sup>

Power range  
2,5 to 7 kW

Pellets  
Feed hopper: 16,5 kg

W 585 X H 1125 X D 570 mm

Flue diameter 80 mm. Rear flue.

(Comparative tables: p126)



Black 7 kW  
Ref. 6419-64



Red 7 kW  
Ref. 6419-67



Grey 7 kW  
Ref. 6419-68



2-YEAR<sup>™</sup>  
Warranty

# NOLA 10

With its sleek style, this pellet stove will fit right into your home, ensuring a unique feeling of well-being.



Red  
Ref. 6418-17



Black  
Ref. 6418-14



Grey  
Ref. 6418-18

W 465 X H 1125 X D 500 mm  
Flue diameter 80 mm. Rear flue.  
(Comparative tables: p126)  
Available in 7 kW version p.22



Heating surface  
35 to 120 m<sup>2</sup>

---

Power range  
2,5 to 10 kW

---

Pellets  
Feed hopper: 16,5 kg

# TRATTO 6

In either grey or black, the shapely side panels of the Tratto pellet stove provide a stylish addition to any room. This pellet stove is practical and efficient and transforms your interior space into a cosy nest to relax and unwind.



Heating surface  
25 to 70 m<sup>2</sup>

Power range  
2,5 to 6 kW

Pellets  
Feed hopper: 16,5 kg

W 540 X H 1010 X D 520 mm  
Flue diameter 80 mm. Rear flue.  
(Comparative tables: p126)



Black  
Réf. 6412-64



Grey  
Réf. 6412-68



2-YEAR<sup>®</sup>  
Warranty

# TRATTO 9



Heating surface  
35 to 110 m<sup>2</sup>

Power range  
2,5 to 9 kW

Pellets  
Feed hopper: 16,5 kg

W 540 X H 1010 X D 520 mm  
Flue diameter 80 mm. Rear flue.  
(Comparative tables: p126)



Black  
Réf. 6412-94



Grey  
Réf. 6412-98



2-YEAR<sup>®</sup>  
Warranty



Heating  
surface  
35 to 110 m<sup>2</sup>

Power  
range  
2,5 to 9 kW

Pellets  
Feed hopper: 16,5 kg



# VASTO 9

Thanks to its sober and elegant design and compact size, Vasto is a welcome addition to any type of home. This highly concentrated and efficient stove offers high performance and low environmental impact.

W 465 X H 965 X D 485 mm  
Flue diameter 80 mm. Rear flue.  
(Comparative tables: p127)



Black  
Ref. 6413-94

2-YEAR<sup>(1)</sup>  
Warranty



# NOVEDIA 10

The contrast of colours and materials gives an elegant dimension to this pellet stove. The ceramic top in white, ivory or Bordeaux sublimates the black surrounding of this chic pellet stove.



|                          |
|--------------------------|
| Heating surface          |
| 35 to 120 m <sup>2</sup> |
| Power range              |
| 2,5 to 10 kW             |
| Pellets                  |
| Feed hopper: 16,5 kg     |

W 500 X H 1125 X D 500 mm

Flue diameter 80 mm. Rear flue.

(Comparative tables: p127)

Available until the end of the stock.



Ivory top ceramic  
Ref. 6417-16



White top ceramic  
Ref. 6417-10



Bordeaux top ceramic  
Ref. 6417-17



# NOVEDIA 7



|                         |
|-------------------------|
| Heating surface         |
| 25 to 85 m <sup>2</sup> |
| Power range             |
| 2,5 to 7 kW             |
| Pellets                 |
| Feed hopper: 16,5 kg    |

W 500 X H 1125 X D 500 mm

Flue diameter 80 mm. Rear flue.

(Comparative tables: p127)

Available until the end of the stock.




Ivory top ceramic  
Ref. 6417-76



White top ceramic  
Ref. 6417-70



Bordeaux top ceramic  
Ref. 6417-77



Power  
range  
6,5 to 15 kW

Optimum  
power  
10 kW  
= 3.3 kg wood / hour

Maximum size  
of logs  
30 cm



# LA ROYALE

## WOOD COOKER

The unmistakable look of this cooker harks back to a time of authentic cooking and heating of the kind our great-grandparents knew. Its large capacity oven and its hob with two hotplates made of concentric rings offer a host of cooking possibilities.



W 912 X H 860 X D 655 mm  
Flue diameter 150 mm.  
Top flue or rear flue.  
(Comparative tables: p127)




Black enamel  
Ref. 6189-65

1-YEAR<sup>15</sup>  
Warranty

## GLASS PLATES

Shapes of glass floor plates to be installed under your stove. ESG security glass, thickness 6 mm.

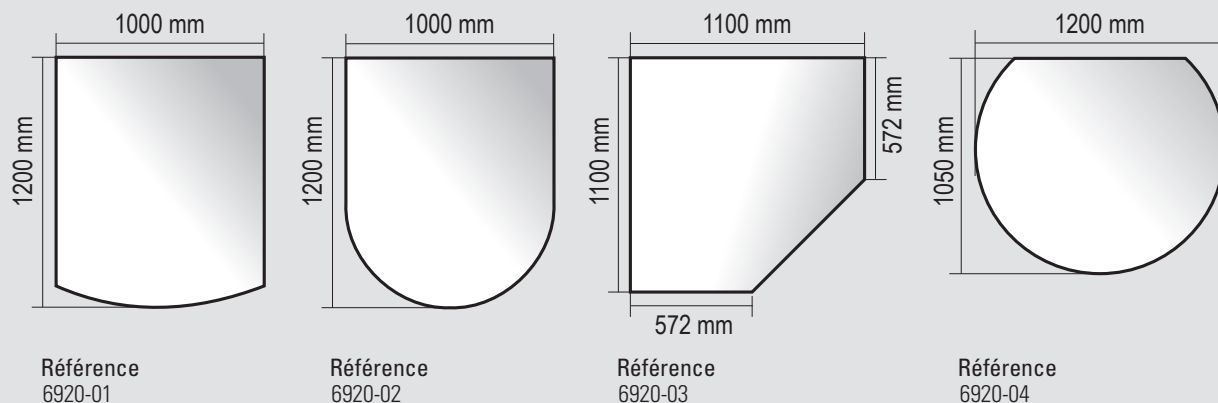

## WALL PROTECTION PANELS

Reference  
6996-80

Dimensions  
W 800 x H 960 mm

Thickness  
50 mm

Weight  
11,6 Kg

Material  
Cold rolled steel

Finish  
High temperature epoxy black paint

Screws supplied



Reference  
6946-80

Dimensions  
W 800 x H 460 mm

Thickness  
50 mm

Weight  
6 Kg

Material  
Cold rolled steel

Finish  
High temperature epoxy black paint

Screws supplied



## BENCHES

Reference  
6961-28

Dimensions  
W 1600 x H 450 x P 550 mm

Material  
3 mm steel

Finish  
Black epoxy

4 adjustable feet



Reference  
6961-31

Dimensions  
W 1000 x H 450 x P 550 mm


Material  
3 mm steel

Finish  
Black epoxy

4 adjustable feet




|  | 6418-74<br>NOLA 7              | 6013-84<br>REMILLY     | 6102-48<br>ELO M       | 6152-44<br>POW-WOW     | 6478-44<br>KAORI       | 6479-44<br>FIFTY ARCHE             | 6453-44<br>ARATOS      |
|--|--------------------------------|------------------------|------------------------|------------------------|------------------------|------------------------------------|------------------------|
| Page   | 22                             | 23                     | 24-25                  | 26                     | 27                     | 28                                 | 29                     |
| Designation  | <b>PELLET STOVE</b>            | <b>CAST IRON STOVE</b> | <b>CAST IRON STOVE</b> | <b>CAST IRON STOVE</b> | <b>CAST IRON STOVE</b> | <b>CAST IRON STOVE</b>             | <b>CAST IRON STOVE</b> |
| <b>DIMENSIONS AND WEIGHT</b>                         |                                |                        |                        |                        |                        |                                    |                        |
| Height   | 1125                           | 800                    | 880                    | 1895                   | 773                    | 755                                | 1050                   |
| Width  | 465                            | 436                    | 500                    | Ø817                   | 754                    | 922                                | 527                    |
| Depth  | 500                            | 364                    | 374                    | Ø817                   | 404                    | 442,5                              | 453                    |
| Flue diameter  | 80                             | 150                    | 150                    | 200                    | 150                    | 150                                | 150                    |
| Flue height  | 210                            | -                      | -                      | -                      | 601                    | 568                                | -                      |
| Log length (cm)                                      | Pellets<br>feed hopper 16,5 kg | 34                     | 33                     | 50                     | 58                     | 60                                 | 40                     |
| Weight (kg)  | 108                            | 72                     | 110                    | 194                    | 152                    | 176,5                              | 123                    |
| <b>HEATING PERFORMANCE</b>                           |                                |                        |                        |                        |                        |                                    |                        |
| Optimal heat output (kW) <sup>1</sup>                | 7                              | 7                      | 5                      | 14                     | 9                      | 10                                 | 8                      |
| Heat output adjustment <sup>2</sup>                  | 2,5 to 7                       | 4,5 to 10,5            | 3 to 7,5               | 9,5 to 21              | 6 to 13,5              | 6,5 to 15                          | 5 to 12                |
| Efficiency (%) <sup>3</sup>                          | 80 to 86                       | 78                     | 75                     | 76                     | 75                     | 76                                 | 78                     |
| CO level (%) <sup>4</sup>                            | 0,02 to 0,06                   | 0,10                   | 0,09                   | 0,09                   | 0,1                    | 0,08                               | 0,07                   |
| Performance rate <sup>5</sup>                        | 0,1                            | 0,4                    | 0,5                    | 0,4                    | 0,6                    | 0,5                                | 0,4                    |
| Flamme verte <sup>6</sup>                            | 6 ★                            | 7 ★                    | 7 ★                    | 7 ★                    | 7 ★                    | 7 ★                                | 7 ★                    |
| Ductable<br>Compatible with BBC RT 2012 <sup>7</sup> | -                              | -                      | ✓                      | -                      | -                      | -                                  | -                      |
| Autonomy<br>Extended burning <sup>8</sup>            | 9 to 27h                       | 8h                     | 8h                     | 8h                     | 8h                     | 8h                                 | 8h                     |
| Heating volume (m <sup>3</sup> ) <sup>9</sup>        | 65/210                         | 100/210                | 65/150                 | 185/420                | 125/275                | 135/300                            | 105/240                |
| Heating surface (m <sup>2</sup> ) <sup>10</sup>      | 25/85                          | 40/85                  | 25/60                  | 75/170                 | 50/110                 | 55/120                             | 40/100                 |
| Post combustion system <sup>11</sup>                 | -                              | -                      | ✓                      | ✓                      | ✓                      | ✓                                  | ✓                      |
| Adjustable secondary air <sup>12</sup>               | -                              | ✓                      | ✓                      | ✓                      | ✓                      | ✓                                  | ✓                      |
| Warranty <sup>13</sup>                               | 2 years                        | 5 years                | 5 years                | 5 years                | 5 years                | 5 years                            | 5 years                |
| Standard   | EN14785                        | EN13240                | EN13240<br>BlmSchV     | EN13240<br>BlmSchV     | EN13240<br>BlmSchV     | EN13240<br>BlmSchV                 | EN13240<br>BlmSchV     |
| Finish   | Black<br>Red<br>Grey           | Anthracite             | White enamel           | Anthracite             | Anthracite             | Anthracite<br>Ivory enamel,<br>red | Anthracite             |

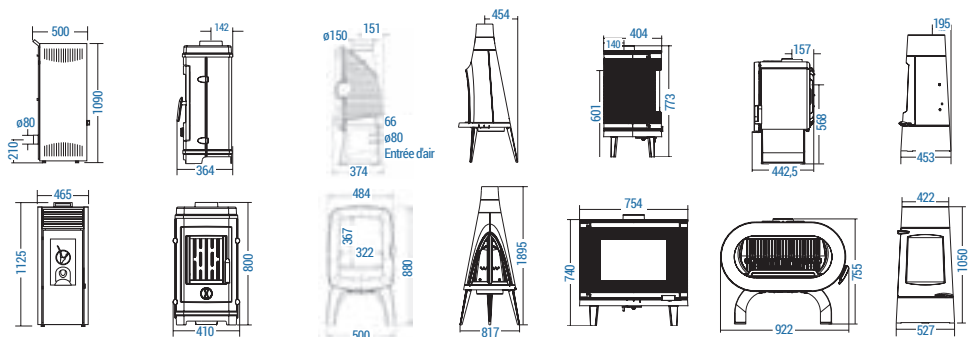






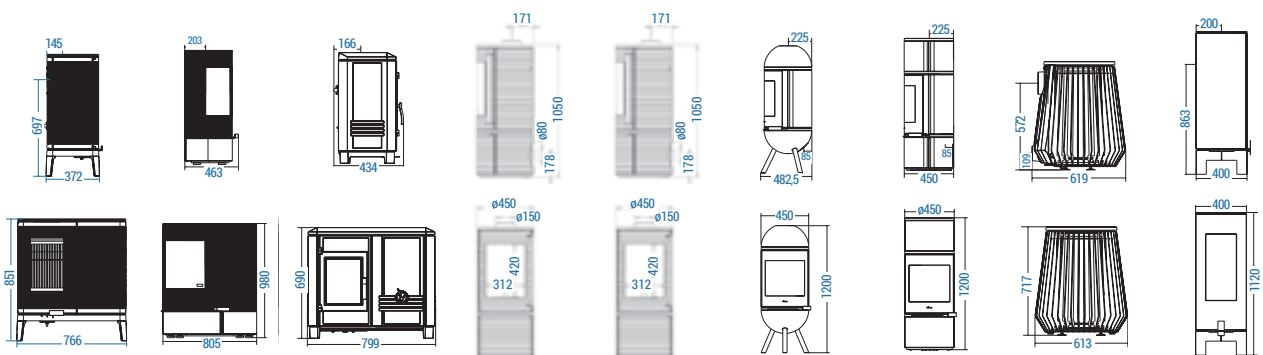



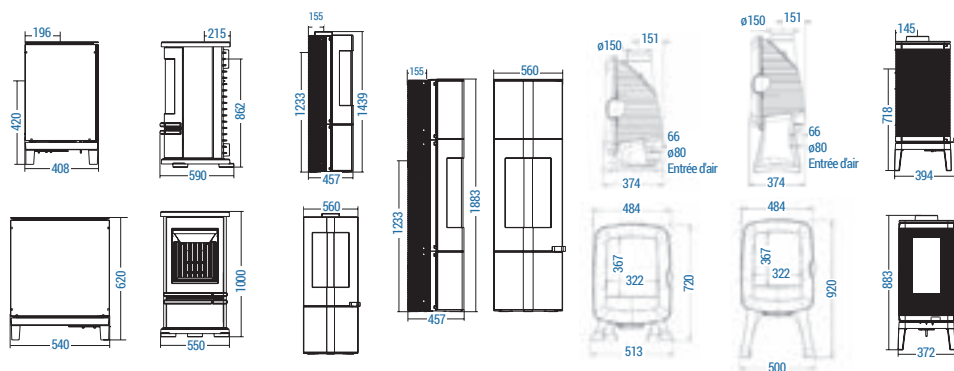


| 6190-44<br>AKIMIX                  | 6196-44<br>MIX                     | 6495-44<br>CAROLO MIX              | 6103-44<br>ALTARA  | 6103-14<br>ALTARA + | 6109-44<br>ALCANDE | 6107-44<br>ALCOR   | 6169-44<br>ÎLOT    | 6122-44<br>WABI    |
|------------------------------------|------------------------------------|------------------------------------|--------------------|---------------------|--------------------|--------------------|--------------------|--------------------|
| 32-33                              | 34                                 | 35                                 | 38- 39             | 38- 39              | 40                 | 41                 | 42                 | 43                 |
| HYBRID<br>STOVE                    | HYBRID<br>STOVE                    | HYBRID<br>STOVE                    | DUCTABLE<br>STOVE  | DUCTABLE<br>STOVE   | DUCTABLE<br>STOVE  | DUCTABLE<br>STOVE  | DUCTABLE<br>STOVE  | DUCTABLE<br>STOVE  |
| 851                                | 980                                | 690                                | 1050               | 1050                | 1200               | 1200               | 716                | 1120               |
| 766                                | 805                                | 799                                | 450                | 450                 | 450                | 450                | 613                | 400                |
| 372                                | 463                                | 434                                | 450                | 450                 | 482,5              | 450                | 619                | 400                |
| 150                                | 150                                | 150                                | 150                | 150                 | 150                | 150                | 150                | 150                |
| 697                                | -                                  | -                                  | -                  | -                   | -                  | -                  | 572                | 863                |
| 38 or pellets<br>feed hopper 15 kg | 38 or pellets<br>feed hopper 11 kg | 35 or pellets<br>feed hopper 15 kg | 40                 | 40                  | 33                 | 33                 | 30                 | 30                 |
| 181                                | 252                                | 146                                | 135                | 141                 | 174                | 198                | 160                | 190                |
| 7                                  | 6                                  | 7                                  | 7                  | 7                   | 6                  | 6                  | 8                  | 6                  |
| pellets<br>3,5 to 6,5              | pellets<br>2,5 to 6,5              | pellets<br>3,5 to 6,5              | 4,5 to 10,5        | 4,5 to 10,5         | 4 to 9             | 4 to 9             | 5 to 12            | 4 to 9             |
| 76                                 | 77                                 | 76                                 | 79                 | 79                  | 77                 | 77                 | 78                 | 79                 |
| 0,10                               | 0,08                               | 0,10                               | 0,07               | 0,07                | 0,10               | 0,10               | 0,04               | 0,05               |
| 0,5                                | 0,6                                | 0,5                                | 0,3                | 0,3                 | 0,4                | 0,4                | 0,2                | 0,3                |
| 7 ★                                | 6 ★                                | 7 ★                                | 7 ★                | 7 ★                 | 7 ★                | 7 ★                | 7 ★                | 7 ★                |
| -                                  | ✓                                  | -                                  | ✓                  | ✓                   | ✓                  | ✓                  | ✓                  | ✓                  |
| Pellets /wood<br>8 to 17h / 8h     | Pellets /wood<br>6 to 13h / 8h     | Pellets /wood<br>8 to 17h / 8h     | 8h                 | 8h                  | 8h                 | 8h                 | intermittent       | 8h                 |
| 95/210                             | 80/180                             | 100/210                            | 100/210            | 100/210             | 80/180             | 80/180             | 105/240            | 80/180             |
| 40/85                              | 30/70                              | 40/85                              | 40/85              | 40/85               | 30/70              | 30/70              | 40/100             | 30/70              |
| ✓                                  | ✓                                  | ✓                                  | ✓                  | ✓                   | ✓                  | ✓                  | -                  | ✓                  |
| ✓                                  | ✓                                  | ✓                                  | ✓                  | ✓                   | ✓                  | ✓                  | -                  | -                  |
| 5 years                            | 5 years                            | 5 years                            | 5 years            | 5 years             | 5 years            | 5 years            | 5 years            | 5 years            |
| EN13240<br>BlmSchV                 | EN13240                            | EN13240                            | EN13240<br>BlmSchV | EN13240<br>BlmSchV  | EN13240<br>BlmSchV | EN13240<br>BlmSchV | EN13240<br>BlmSchV | EN13240<br>BlmSchV |
| Anthracite                         | Anthracite                         | Anthracite                         | Anthracite         | Anthracite          | Anthracite         | Anthracite         | Anthracite         | Anthracite         |






|  | 6131-04<br>RÉVA       | 6194-44<br>ORENSE               | 6142-44<br>MOAI       | 6143-44<br>MANA       | 6102-14<br>ELO S      | 6102-44<br>ELO L      | 6106-44<br>IWAKI       |
|--|-----------------------|---------------------------------|-----------------------|-----------------------|-----------------------|-----------------------|------------------------|
| Page   | 43                    | 44                              | 45                    | 45                    | 46-47                 | 47                    | 50                     |
| Designation  | <b>DUCTABLE STOVE</b> | <b>DUCTABLE STOVE</b>           | <b>DUCTABLE STOVE</b> | <b>DUCTABLE STOVE</b> | <b>DUCTABLE STOVE</b> | <b>DUCTABLE STOVE</b> | <b>CAST IRON STOVE</b> |
| <b>DIMENSIONS AND WEIGHT</b>                         |                       |                                 |                       |                       |                       |                       |                        |
| Height   | 620                   | 1000                            | 1439                  | 1883                  | 720                   | 920                   | 883                    |
| Width  | 540                   | 550                             | 560                   | 560                   | 513                   | 500                   | 372                    |
| Depth  | 408                   | 590                             | 457                   | 457                   | 374                   | 374                   | 394                    |
| Flue diameter  | 150                   | 150                             | 180                   | 180                   | 150                   | 150                   | 150                    |
| Flue height  | 420                   | 862                             | 1233                  | 1233                  | -                     | -                     | 718                    |
| Log length (cm)                                      | 37                    | 38                              | 35                    | 35                    | 33                    | 33                    | 34                     |
| Weight (kg)  | 155                   | 192                             | 240                   | 300                   | 90                    | 100                   | 118                    |
| <b>HEATING PERFORMANCE</b>                           |                       |                                 |                       |                       |                       |                       |                        |
| Optimal heat output (kW) <sup>1</sup>                | 5                     | 8                               | 8                     | 8                     | 5                     | 5                     | 7                      |
| Heat output adjustment <sup>2</sup>                  | 3 to 7,5              | 5 to 12                         | 5 to 12               | 5 to 12               | 3 to 7,5              | 3 to 7,5              | 4,5 to 10,5            |
| Efficiency (%) <sup>3</sup>                          | 78                    | 76                              | 77                    | 77                    | 75                    | 75                    | 78                     |
| CO level (%) <sup>4</sup>                            | 0,08                  | 0,13                            | 0,08                  | 0,08                  | 0,09                  | 0,09                  | 0,07                   |
| Performance rate <sup>5</sup>                        | 0,4                   | 0,7                             | 0,4                   | 0,4                   | 0,5                   | 0,5                   | 0,4                    |
| Flamme verte <sup>6</sup>                            | 7 ★                   | 6 ★                             | 7 ★                   | 7 ★                   | 7 ★                   | 7 ★                   | 7 ★                    |
| Ductable<br>Compatible with BBC RT 2012 <sup>7</sup> | ✓                     | ✓                               | ✓                     | ✓                     | ✓                     | ✓                     | -                      |
| Autonomy<br>Extended burning <sup>8</sup>            | 8h                    | 8h                              | 8h                    | 8h                    | 8h                    | 8h                    | 8h                     |
| Heating volume (m <sup>3</sup> ) <sup>9</sup>        | 65/150                | 105/240                         | 105/240               | 105/240               | 65/150                | 65/150                | 100/210                |
| Heating surface (m <sup>2</sup> ) <sup>10</sup>      | 25/60                 | 40/100                          | 40/100                | 40/100                | 25/60                 | 25/60                 | 40/85                  |
| Post combustion system <sup>11</sup>                 | ✓                     | ✓                               | ✓                     | ✓                     | ✓                     | ✓                     | ✓                      |
| Adjustable secondary air <sup>12</sup>               | -                     | -                               | ✓                     | ✓                     | ✓                     | ✓                     | ✓                      |
| Warranty <sup>13</sup>                               | 5 years               | 5 years                         | 5 years               | 5 years               | 5 years               | 5 years               | 5 years                |
| Standard   | EN13240<br>BlmSchV    | EN13240<br>BlmSchV              | EN13240<br>BlmSchV    | EN13240<br>BlmSchV    | EN13240<br>BlmSchV    | EN13240<br>BlmSchV    | EN13240<br>BlmSchV     |
| Finish   | Anthracite            | Anthracite<br>Chrome<br>handles | Anthracite            | Anthracite            | Anthracite            | Anthracite            | Anthracite             |




|  |  |  |  |  |  |  |  |  |
|--|--|--|--|--|--|---|--|--|
| 6106-24<br>IWAKI ON BASE<br>SIDE GLASSES   | 6105-44<br>OKINO   | 9450-44<br>SEDAN S   | 9121-44<br>NORIK   | 6123-44<br>LUDIA   | 6199-44<br>MANDRA  | 6181-48<br>TENNESSEE  | 9162-44<br>CAROLO  | 6454-44<br>LA BORNE 2  |
| 51   | 51   | 52   | 53   | 54   | 55   | 56-57   | 58   | 59   |
| CAST IRON<br>STOVE   | CAST IRON<br>STOVE   | CAST IRON<br>STOVE   | CAST IRON<br>STOVE   | CAST IRON<br>STOVE   | CAST IRON<br>STOVE   | CAST IRON<br>STOVE  | CAST IRON<br>STOVE   | CAST IRON<br>STOVE   |
| 1023   | 891  | 627  | 674  | 1035   | 920  | 798   | 690  | 719  |
| 360  | 402  | 500  | 620  | 536  | 624  | 780   | 620  | 548  |
| 372  | 402  | 443  | 465  | 437  | 408  | 428   | 439  | 400  |
| 150  | 150  | 150  | 150  | 150  | 150  | 180   | 150  | 150  |
| 858  | -  | -  | 500  | -  | 655  | 604   | 516  | -  |
| 34   | 34   | 30   | 50   | 40   | 32   | 54  | 56   | 45   |
| 140  | 112  | 84   | 104  | 114  | 104  | 170   | 118  | 89   |
| 7  | 7  | 5  | 6  | 10   | 5  | 8   | 8  | 7  |
| 4,5 to 10,5  | 4,5 to 10,5  | 3 to 7,5   | 4 to 9   | 6,5 to 15  | 3 to 7,5   | 5 to 12   | 5 to 12  | 4,5 to 10,5  |
| 78   | 78   | 78   | 78   | 76   | 79   | 76,5  | 75   | 78   |
| 0,07   | 0,07   | 0,07   | 0,12   | 0,09   | 0,09   | 0,10  | 0,12   | 0,12   |
| 0,4  | 0,4  | 0,3  | 0,5  | 0,5  | 0,4  | 0,6   | 0,7  | 0,5  |
| 7 ★  | 7 ★  | 7 ★  | 7 ★  | 7 ★  | 7 ★  | 6 ★   | 7 ★  | 7 ★  |
| -  | -  | -  | -  | -  | -  | -   | -  | -  |
| 8h   | 8h   | 8h   | 8h   | 8h   | 8h   | 8h  | 8h   | 8h   |
| 100/210  | 100/210  | 65/150   | 80/180   | 135/300  | 65/150   | 105/240   | 105/240  | 100/210  |
| 40/85  | 40/85  | 25/60  | 30/75  | 55/120   | 25/60  | 40/100  | 40/100   | 40/85  |
| ✓  | ✓  | ✓  | ✓  | ✓  | ✓  | ✓   | ✓  | ✓  |
| ✓  | ✓  | ✓  | ✓  | ✓  | ✓  | ✓   | ✓  | ✓  |
| 5 years  | 5 years  | 5 years  | 5 years  | 5 years  | 5 years  | 5 years   | 5 years  | 5 years  |
| EN13240<br>BlmSchV   | EN13240<br>BlmSchV   | EN13240  | EN13240  | EN13240<br>BlmSchV   | EN13240<br>BlmSchV   | EN13240   | EN13240  | EN13240  |
| Anthracite   | Anthracite   | Anthracite<br>Red enamel,<br>black, grey, ivory                                  | Anthracite   | Anthracite   | Anthracite   | Anthracite<br>White enamel,<br>red, black   | Anthracite   | Anthracite   |

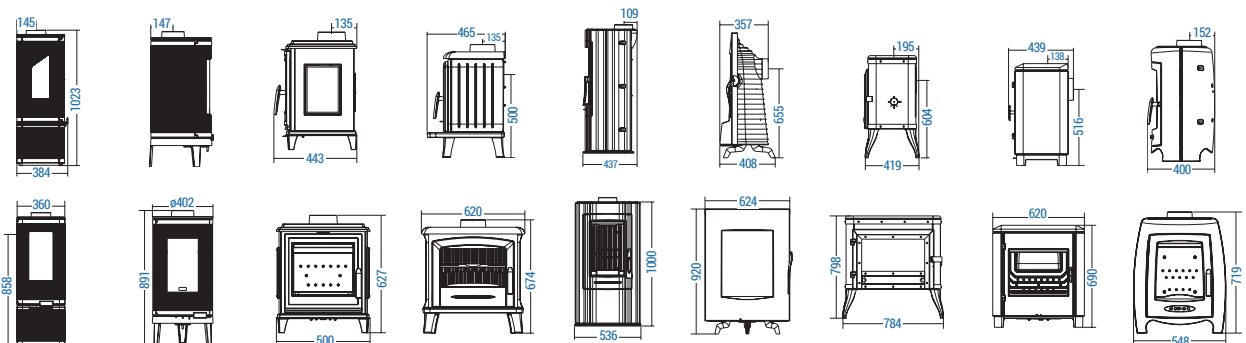



|  | 6198-44<br>SOREL                    | 6137-44<br>CHÂTEL      | 6136-44<br>MESNIL      | 9148-44<br>SAMARA      | 9166-44<br>ALTEA       | 6104-44<br>KAZAN       | 6104-43<br>KAZAN GA    |
|--|-------------------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|
| Page   | 59                                  | 60                     | 60                     | 61                     | 61                     | 62                     | 63                     |
| Designation  | <b>CAST IRON STOVE</b>              | <b>CAST IRON STOVE</b> | <b>CAST IRON STOVE</b> | <b>CAST IRON STOVE</b> | <b>CAST IRON STOVE</b> | <b>CAST IRON STOVE</b> | <b>CAST IRON STOVE</b> |
| <b>DIMENSIONS AND WEIGHT</b>                         |                                     |                        |                        |                        |                        |                        |                        |
| Height   | 1055                                | 830                    | 986                    | 644                    | 744                    | 801                    | 801                    |
| Width  | 417                                 | 476                    | 486,5                  | 634                    | 644                    | 652                    | 652                    |
| Depth  | 517,5                               | 375                    | 385                    | 462                    | 556                    | 372                    | 372                    |
| Flue diameter  | 97                                  | 150                    | 150                    | 150                    | 150                    | 150                    | 150                    |
| Flue height  | 938,5                               | -                      | -                      | 472                    | 616                    | 636                    | 636                    |
| Log length (cm)                                      | 65                                  | 34                     | 34                     | 50                     | 50                     | 58                     | 58                     |
| Weight (kg)  | 67                                  | 80                     | 88                     | 107                    | 133                    | 157                    | 162                    |
| <b>HEATING PERFORMANCE</b>                           |                                     |                        |                        |                        |                        |                        |                        |
| Optimal heat output (kW) <sup>1</sup>                | 8                                   | 8                      | 8                      | 6                      | 8                      | 9                      | 9                      |
| Heat output adjustment <sup>2</sup>                  | 5 to 12                             | 5 to 12                | 5 to 12                | 4 to 9                 | 5 to 12                | 6 to 13,5              | 6 to 13,5              |
| Efficiency (%) <sup>3</sup>                          | 75                                  | 77                     | 77                     | 78                     | 75                     | 76                     | 76                     |
| CO level (%) <sup>4</sup>                            | 0,29                                | 0,09                   | 0,09                   | 0,12                   | 0,12                   | 0,08                   | 0,08                   |
| Performance rate <sup>5</sup>                        | 1,9                                 | 0,4                    | 0,4                    | 0,5                    | 0,7                    | 0,5                    | 0,5                    |
| Flamme verte <sup>6</sup>                            | -                                   | 7 ★                    | 7 ★                    | 7 ★                    | 7 ★                    | 7 ★                    | 7 ★                    |
| Ductable<br>Compatible with BBC RT 2012 <sup>7</sup> | -                                   | -                      | -                      | -                      | -                      | -                      | -                      |
| Autonomy<br>Extended burning <sup>8</sup>            | 8h                                  | 8h                     | 8h                     | 8h                     | 8h                     | 8h                     | 8h                     |
| Heating volume (m <sup>3</sup> ) <sup>9</sup>        | 105/240                             | 105/240                | 105/240                | 80/180                 | 105/240                | 125/275                | 125/275                |
| Heating surface (m <sup>2</sup> ) <sup>10</sup>      | 40/100                              | 40/100                 | 40/100                 | 30/70                  | 40/100                 | 50/110                 | 50/110                 |
| Post combustion system <sup>11</sup>                 | -                                   | -                      | -                      | ✓                      | ✓                      | ✓                      | ✓                      |
| Adjustable secondary air <sup>12</sup>               | -                                   | ✓                      | ✓                      | ✓                      | ✓                      | ✓                      | ✓                      |
| Warranty <sup>13</sup>                               | 5 years                             | 5 years                | 5 years                | 5 years                | 5 years                | 5 years                | 5 years                |
| Standard   | EN13240                             | EN13240<br>BlmSchV     | EN13240<br>BlmSchV     | EN13240                | EN13240                | EN13240<br>BlmSchV     | EN13240<br>BlmSchV     |
| Finish   | Anthracite<br>Ivory enamel,<br>blue | Anthracite             | Anthracite             | Anthracite             | Anthracite             | Anthracite             | Anthracite             |

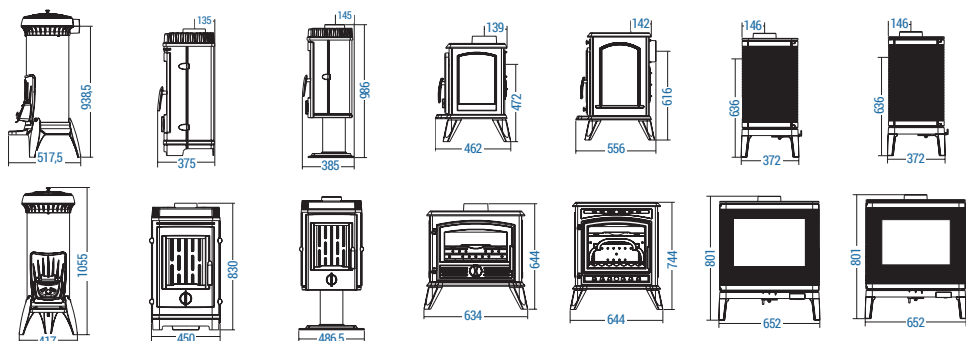





9170-44  
SIAM

9172-44  
SEDAN L

9160-48  
SEDAN M

9174-44  
RÉGENT

6145-44  
MAIRY

6147-44  
CASSINE

9173-47  
BRADFORD

9175-45  
MODENA

6480-44  
FIFTY

64

65

65

66

66

67

68

69

70-71

CAST IRON  
STOVE

CAST IRON  
STOVE

CAST IRON  
STOVE

CAST IRON  
STOVE

CAST IRON  
STOVE

CAST IRON  
STOVE

CAST IRON  
STOVE

CAST IRON  
STOVE

CAST IRON  
STOVE

803

770

701

736

1098

977

690

741

850

700

766

644

764

524

513

730

764

922

451

523

463

480

426,5

415

613

508

442

150

180

150

150

150

150

150

150

150

615

616

556

562

-

-

509

562

663

60

60

42

50

40

40

54

50

60

143

164,5

126

170

107

103

175

170

180

12

12

10

10

10

10

9

10

10

8 to 18

8 to 18

6,5 to 15

6,5 to 15

6,5 to 15

6,5 to 15

6 to 13,5

6,5 to 15

6,5 to 15

75

75

75

75

76

76

75

75

76

0,11

0,12

0,12

0,12

0,09

0,09

0,12

0,12

0,08

0,7

0,7

0,7

0,7

0,5

0,5

0,7

0,7

0,5

7 ★

7 ★

7 ★

7 ★

7 ★

7 ★

7 ★

7 ★

7 ★

8h

8h

8h

8h

8h

8h

8h

8h

8h

160/360

160/360

135/300

135/300

135/300

135/300

125/275

135/300

135/300

65/145

65/145

55/120

55/120

55/120

55/120

50/110

55/120

55/120

✓

✓

✓

✓

✓

✓

✓

✓

✓

✓

✓

✓

✓

✓

✓

✓

✓

✓

5 years

5 years

5 years

5 years

5 years

5 years

5 years

5 years

5 years

EN13240

EN13240

EN13240

EN13240

EN13240  
BlmSchV

EN13240  
BlmSchV

EN13240

EN13240

EN13240  
BlmSchV

Anthracite

Anthracite  
Ivory enamel,  
grey

Anthracite  
Ivory enamel,  
red, grey

Anthracite















Anthracite

Anthracite

Anthracite  
Ivory enamel,  
red


Anthracite  
Yellow enamel,  
ivory, red, grey

Anthracite  
Ivory enamel,  
red






|  | 6153-44<br>TIPI        | 6156-14<br>CHAMANE 10  | 6192-47<br>SEVILLE 2                      | 6149-44<br>OVE         | 6182-43<br>LUNA                           | 6114-44<br>ANTAYA      | 6113-44 THÉIA<br>6111-44 AKAN |
|--|------------------------|------------------------|---|------------------------|---|------------------------|-------------------------------|
| Page   | 72                     | 73                     | 74-75                                     | 76                     | 77  | 78                     | 79-80                         |
| Designation  | <b>CAST IRON STOVE</b> | <b>CAST IRON STOVE</b> | <b>CAST IRON STOVE</b>                    | <b>CAST IRON STOVE</b> | <b>CAST IRON STOVE</b>                    | <b>CAST IRON STOVE</b> | <b>CAST IRON STOVE</b>        |
| <b>DIMENSIONS AND WEIGHT</b>                         |                        |                        |   |                        |   |                        |                               |
| Height   | 1585                   | 1200                   | 692                                       | 1310                   | 810                                       | 899                    | 913                           |
| Width  | Ø 754                  | 560                    | 560                                       | Ø 550                  | 833                                       | 1051                   | 1034                          |
| Depth  | Ø 754                  | 578                    | 462,5                                     | Ø 550                  | 457                                       | 480                    | 491                           |
| Flue diameter  | 200                    | 180                    | 150                                       | 180                    | 180                                       | 180                    | 180                           |
| Flue height  | -                      | -                      | -   | -                      | 628                                       | 717                    | 717                           |
| Log length (cm)                                      | 40                     | 40                     | 40  | 33                     | 52  | 71                     | 71                            |
| Weight (kg)  | 143                    | 160                    | 99  | 167                    | 152                                       | 188                    | 220                           |
| <b>HEATING PERFORMANCE</b>                           |                        |                        |   |                        |   |                        |                               |
| Optimal heat output (kW) <sup>1</sup>                | 10                     | 10                     | 7   | 10                     | 10  | 12                     | 12                            |
| Heat output adjustment <sup>2</sup>                  | 6,5 to 15              | 6,5 to 15              | 4,5 to 10,5                               | 6,5 to 15              | 6,5 to 15                                 | 8 to 18                | 8 to 18                       |
| Efficiency (%) <sup>3</sup>                          | 78                     | 76                     | 77  | 76                     | 80  | 76                     | 76                            |
| CO level (%) <sup>4</sup>                            | 0,05                   | 0,09                   | 0,08                                      | 0,07                   | 0,14                                      | 0,10                   | 0,10                          |
| Performance rate <sup>5</sup>                        | 0,4                    | 0,5                    | 0,4                                       | 0,4                    | 0,5                                       | 0,7                    | 0,7                           |
| Flamme verte <sup>6</sup>                            | 7 ★                    | 7 ★                    | 7 ★                                       | 7 ★                    | 6 ★                                       | 6 ★                    | 6 ★                           |
| Ductable<br>Compatible with BBC RT 2012 <sup>7</sup> | -                      | -                      | -   | -                      | -   | -                      | -                             |
| Autonomy<br>Extended burning <sup>8</sup>            | 8h                     | 8h                     | 8h  | 8h                     | 8h  | 8h                     | 8h                            |
| Heating volume (m <sup>3</sup> ) <sup>9</sup>        | 135/300                | 135/300                | 100/210                                   | 135/300                | 135/300                                   | 160/360                | 160/360                       |
| Heating surface (m <sup>2</sup> ) <sup>10</sup>      | 55/120                 | 55/120                 | 40/85                                     | 55/120                 | 55/120                                    | 65/145                 | 65/145                        |
| Post combustion system <sup>11</sup>                 | ✓                      | ✓                      | ✓   | ✓                      | ✓   | ✓                      | ✓                             |
| Adjustable secondary air <sup>12</sup>               | ✓                      | ✓                      | ✓   | ✓                      | ✓   | ✓                      | ✓                             |
| Warranty <sup>13</sup>                               | 5 years                | 5 years                | 5 years                                   | 5 years                | 5 years                                   | 5 years                | 5 years                       |
| Standard   | EN13240<br>BlmSchV     | EN13240<br>BlmSchV     | EN13240                                   | EN13240<br>BlmSchV     | EN13240                                   | EN13240                | EN13240                       |
| Finish   | Anthracite             | Anthracite             | Anthracite<br>Ivory enamel,<br>red, black | Anthracite             | Anthracite<br>Ivory enamel,<br>red, black | Anthracite             | Anthracite                    |

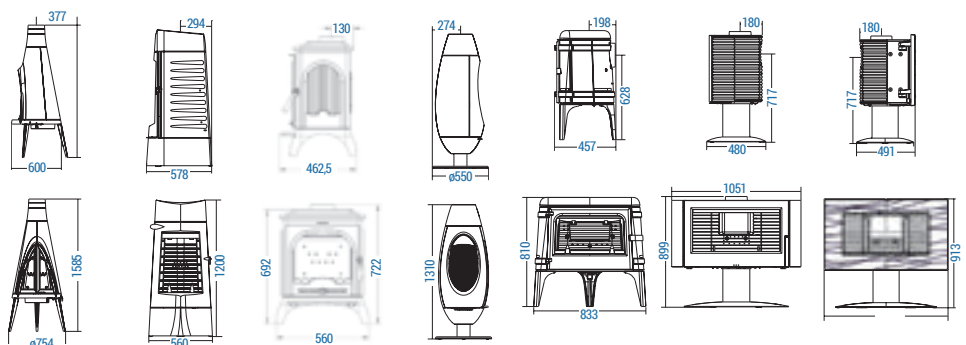









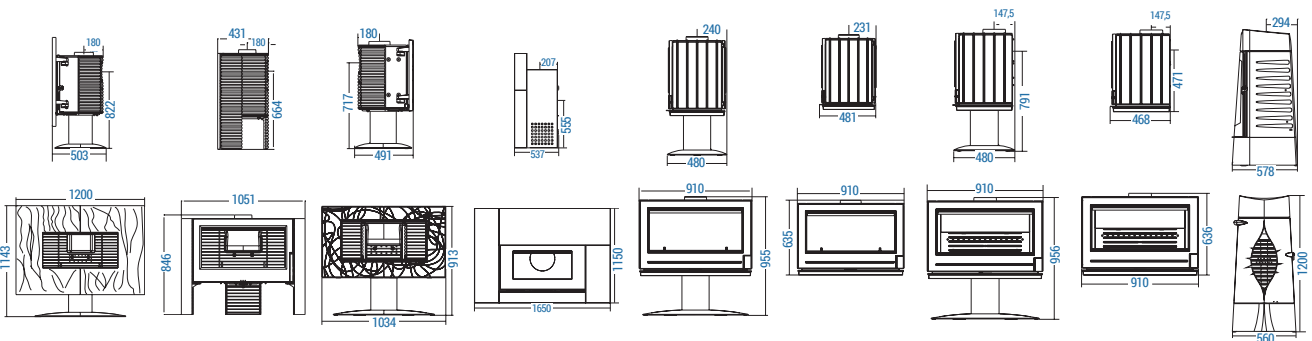







| 6117-44<br>GAYA ARDOISE | 6110-44<br>ITAYA   | 6115-44<br>SYMPHONIA | 6120-46<br>ONYX                  | 6129-44<br>NELSON  | 6129-04<br>AARON   | 6127-44<br>ELTON   | 6128-04<br>PRESTON           | 9159-44 PRÉSAGE 10<br>9157-44 ORACLE 10 |
|-------------------------|--------------------|----------------------|----------------------------------|--------------------|--------------------|--------------------|------------------------------|---|
| 80                      | 81                 | 81                   | 82-83                            | 84                 | 85                 | 86                 | 87                           | 88-89                                   |
| CAST IRON<br>STOVE      | CAST IRON<br>STOVE | CAST IRON<br>STOVE   | CAST IRON<br>STOVE               | CAST IRON<br>STOVE | CAST IRON<br>STOVE | CAST IRON<br>STOVE | CAST IRON<br>STOVE           | CAST IRON<br>STOVE                      |
| 1143                    | 846                | 913                  | 1150                             | 955                | 635                | 956                | 636                          | 1200                                    |
| 1200                    | 1051               | 1034                 | 1650                             | 910                | 910                | 910                | 910                          | 560                                     |
| 503                     | 431                | 491                  | 537                              | 480                | 481                | 480                | 468                          | 578                                     |
| 180                     | 180                | 180                  | 180                              | 180                | 180                | 180                | 180                          | 180                                     |
| 822                     | 664                | 717                  | 555                              | -                  | -                  | 791                | depending on<br>installation | -                                       |
| 71                      | 71                 | 71                   | 71                               | 80                 | 80                 | 80                 | 80                           | 44                                      |
| 206                     | 187                | 199                  | 284                              | 201                | 179                | 210                | 179                          | 169/166                                 |
| 12                      | 12                 | 12                   | 12                               | 12                 | 12                 | 14                 | 14                           | 10                                      |
| 8 to 18                 | 8 to 18            | 8 to 18              | 8 to 18                          | 8 to 18            | 8 to 18            | 9,5 to 21          | 9,5 to 21                    | 6,5 to 15                               |
| 76                      | 76                 | 76                   | 76                               | 70                 | 70                 | 75                 | 75                           | 76                                      |
| 0,10                    | 0,10               | 0,10                 | 0,10                             | 0,15               | 0,15               | 0,15               | 0,15                         | 0,09                                    |
| 0,7                     | 0,7                | 0,7                  | 0,7                              | 1,2                | 1,2                | 0,8                | 0,8                          | 0,5                                     |
| 6 ★                     | 6 ★                | 6 ★                  | 6 ★                              | -                  | -                  | 6 ★                | 6 ★                          | 7 ★                                     |
| -                       | -                  | -                    | -                                | -                  | -                  | -                  | -                            | -                                       |
| 8h                      | 8h                 | 8h                   | 8h                               | intermittent       | intermittent       | 8h                 | 8h                           | 8h                                      |
| 160/360                 | 160/360            | 160/360              | 160/360                          | 160/360            | 160/360            | 185/425            | 185/425                      | 135/300                                 |
| 65/145                  | 65/145             | 65/145               | 65/145                           | 65/145             | 65/145             | 75/170             | 75/170                       | 55/120                                  |
| ✓                       | ✓                  | ✓                    | ✓                                | -                  | -                  | ✓                  | ✓                            | ✓                                       |
| ✓                       | ✓                  | ✓                    | ✓                                | ✓                  | ✓                  | ✓                  | ✓                            | ✓                                       |
| 5 years                 | 5 years            | 5 years              | 5 years                          | 5 years            | 5 years            | 5 years            | 5 years                      | 5 years                                 |
| EN13240                 | EN13240            | EN13240              | EN13240                          | EN13240            | EN13240            | EN13240            | EN13240                      | EN13240                                 |
| Anthracite              | Anthracite         | Anthracite           | Steel<br>surround<br>White epoxy | Anthracite         | Anthracite         | Anthracite         | Anthracite                   | Anthracite                              |




6156-44  
CHAMANE 149150-44  
PHAROS9151-44  
ARGOS9180-44  
MANDOR9186-44  
ANGOR6158-44  
GOMONT6488-14  
ONSEN  
SIDE GLASSES

| Page   | 89                     | 90                     | 91                     | 92                     | 93                     | 93                     | 96                 |
|--|------------------------|------------------------|------------------------|------------------------|------------------------|------------------------|--------------------|
| Designation  | <b>CAST IRON STOVE</b> | <b>CAST IRON STOVE</b> | <b>CAST IRON STOVE</b> | <b>CAST IRON STOVE</b> | <b>CAST IRON STOVE</b> | <b>CAST IRON STOVE</b> | <b>STEEL STOVE</b> |
| <b>DIMENSIONS AND WEIGHT</b>                         |                        |                        |                        |                        |                        |                        |                    |
| Height   | 1200                   | 1240,5                 | 1250                   | 770                    | 770                    | 1130                   | 1048               |
| Width  | 560                    | 531,5                  | 532                    | 852                    | 820                    | 550                    | 502,5              |
| Depth  | 578                    | 530                    | 444                    | 492                    | 471                    | 447,5                  | 518                |
| Flue diameter  | 180                    | 180                    | 180                    | 150                    | 150                    | 150                    | 150                |
| Flue height  | -                      | -                      | -                      | 608                    | 608                    | -                      | -                  |
| Log length (cm)                                      | 44                     | 40                     | 40                     | 60                     | 60                     | 45                     | 40                 |
| Weight (kg)  | 160                    | 167,5                  | 169                    | 144                    | 153                    | 128                    | 126                |
| <b>HEATING PERFORMANCE</b>                           |                        |                        |                        |                        |                        |                        |                    |
| Optimal heat output (kW) <sup>1</sup>                | 14                     | 12                     | 12                     | 12                     | 12                     | 12                     | 6                  |
| Heat output adjustment <sup>2</sup>                  | 9,5 to 21              | 8 to 18                | 8 to 18                | 8 to 18                | 8 to 18                | 8 to 18                | 4 to 9             |
| Efficiency (%) <sup>3</sup>                          | 78,7                   | 75                     | 75                     | 75                     | 75                     | 75                     | 81                 |
| CO level (%) <sup>4</sup>                            | 0,05                   | 0,10                   | 0,10                   | 0,11                   | 0,11                   | 0,10                   | 0,09               |
| Performance rate <sup>5</sup>                        | 0,5                    | 0,7                    | 0,7                    | 0,7                    | 0,7                    | 0,6                    | 0,4                |
| Flamme verte <sup>6</sup>                            | -                      | 7 ★                    | 7 ★                    | 7 ★                    | 7 ★                    | 7 ★                    | 7 ★                |
| Ductable<br>Compatible with BBC RT 2012 <sup>7</sup> | -                      | -                      | -                      | -                      | -                      | -                      | -                  |
| Autonomy<br>Extended burning <sup>8</sup>            | 8h                     | 8h                     | 8h                     | 8h                     | 8h                     | 8h                     | 8h                 |
| Heating volume (m <sup>3</sup> ) <sup>9</sup>        | 185/425                | 160/360                | 160/360                | 160/360                | 160/360                | 160/360                | 80/180             |
| Heating surface (m <sup>2</sup> ) <sup>10</sup>      | 75/170                 | 65/145                 | 65/145                 | 65/145                 | 65/145                 | 65/145                 | 30/70              |
| Post combustion system <sup>11</sup>                 | ✓                      | ✓                      | ✓                      | ✓                      | ✓                      | ✓                      | ✓                  |
| Adjustable secondary air <sup>12</sup>               | ✓                      | ✓                      | ✓                      | ✓                      | ✓                      | ✓                      | ✓                  |
| Warranty <sup>13</sup>                               | 5 years                | 5 years                | 5 years                | 5 years                | 5 years                | 5 years                | 5 years            |
| Standard   | EN13240                | EN13240                | EN13240                | EN13240                | EN13240                | EN13240<br>BlmSchV     | EN13240<br>BlmSchV |
| Finish   | Anthracite             | Anthracite             | Anthracite             | Anthracite             | Anthracite             | Anthracite             | Black              |




|  |  |  |  |  |  |  |  |  |  |
|--|--|--|--|--|--|---|--|--|--|
| 6488-10<br>ONSEN   | 6488-11<br>ONSEN<br>DUCTABLE   | 6488-00<br>AURES   | 6488-35<br>SKARA   | 6488-30<br>NARVIK  | 6488-20<br>TANA  | 6488-21 TANA ON BASE<br>6488-22 TANA GA ON BASE                                   | 6409-7X<br>SERINO 7  | 6420-00<br>PHILIA 9E   |  |
| 97   | 97   | 98   | 98   | 99   | 100  | 101   | 104  | 105  |  |
| STEEL<br>STOVE   | STEEL<br>STOVE   | STEEL<br>STOVE   | STEEL<br>STOVE   | STEEL<br>STOVE   | STEEL<br>STOVE   | STEEL<br>STOVE  | PELLET<br>STOVE  | PELLET<br>STOVE  |  |
| 1048   | 1048   | 734  | 1239   | 1360   | 930  | 1145  | 950  | 988  |  |
| 502,5  | 502,5  | 699  | 519  | 555  | 710  | 710   | 470  | 472  |  |
| 518  | 518  | 519  | 446  | 555  | 510  | 510   | 560  | 468  |  |
| 150  | 150  | 150  | 150  | 150  | 150  | 150   | 80   | 80   |  |
| -  | -  | 590  | 1108   | 1215   | 827  | 1020  | 140  | 235  |  |
| 40   | 40   | 51   | 27   | 37   | 51   | 51  | Pellets<br>feed hopper 15 kg   | Pellets<br>feed hopper 16,5 kg   |  |
| 126  | 135  | 85   | 112  | 130  | 107  | 135   | 83   | 134  |  |
| 6  | 6  | 8,5  | 7  | 7  | 8  | 8   | 7  | 9  |  |
| 4 to 9   | 4 to 9   | 5,5 to 13  | 4,5 to 10,5  | 4,5 to 10,5  | 5 to 12  | 5 to 12   | 3,1 to 7,3   | 3,4 to 9   |  |
| 81   | 78   | 77   | 81,8   | 79   | 81   | 80  | 87 to 90   | 87,3   |  |
| 0,09   | 0,07   | 0,09   | 0,10   | 0,09   | 0,06   | 0,04  | 0,02 to 0,04   | 0,016  |  |
| 0,4  | 0,4  | 0,5  | 0,4  | 0,5  | 0,3  | 0,3   | 0,1  | 0,1  |  |
| 7 ★  | 7 ★  | 7 ★  | 7 ★  | 7 ★  | 7 ★  | 7 ★   | 6 ★  | 7 ★  |  |
| -  | ✓  | -  | ✓  | ✓  | -  | ✓   | -  | -  |  |
| 8h   | 8h   | 8h   | 8h   | 8h   | 8h   | 8h  | 8 to 21h   | 7 to 20h   |  |
| 80/180   | 80/180   | 110/255  | 100/210  | 100/210  | 105/240  | 105/240   | 75/225   | 180/275  |  |
| 30/70  | 30/70  | 45/105   | 40/85  | 40/85  | 40/100   | 40/100  | 30/90  | 40/100   |  |
| ✓  | ✓  | ✓  | ✓  | ✓  | ✓  | ✓   | -  | -  |  |
| ✓  | ✓  | ✓  | ✓  | ✓  | ✓  | ✓   | -  | -  |  |
| 5 years  | 5 years  | 5 years  | 5 years  | 5 years  | 5 years  | 5 years   | 2 years  | 2 years  |  |
| EN13240<br>BlmSchV   | EN13240<br>BlmSchV   | EN13240<br>BlmSchV   | EN13240<br>BlmSchV   | EN13240<br>BlmSchV   | EN13240<br>BlmSchV   | EN13240<br>BlmSchV  | EN14785  | EN14785  |  |
| Black  | Black  | Black  | Black  | Black  | Black  | Black   | Black<br>Grey  | Black  |  |

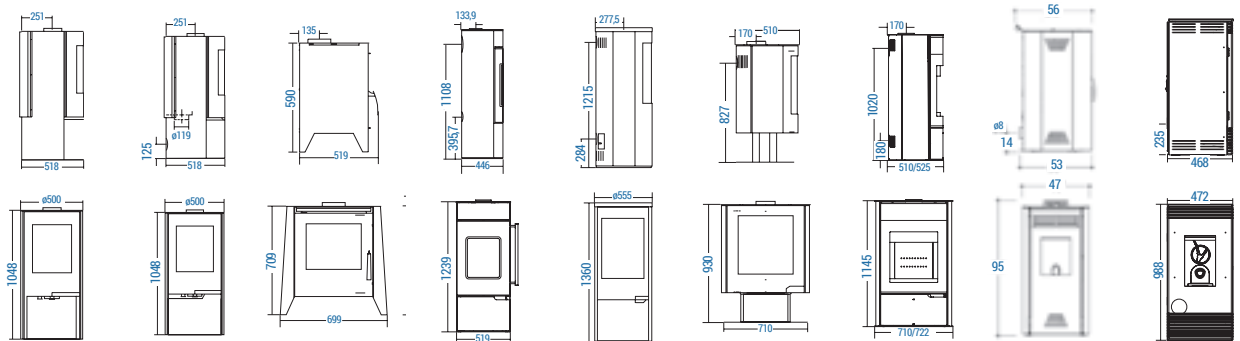



|  | 6420-01<br>UBLO 9E             | 6419-7X<br>LODI 10             | 6419-6X<br>LODI 7              | 6418-1X<br>NOLA 10             | 6412-6X<br>TRATTO 6            | 6412-9X<br>TRATTO 9            | 6413-94<br>VASTO 9             |
|--|--------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|
| Page   | 106-107                        | 108                            | 108                            | 109                            | 110                            | 110                            | 112                            |
| Designation  | PELLET<br>STOVE                | PELLET<br>STOVE                | PELLET<br>STOVE                | PELLET<br>STOVE                | PELLET<br>STOVE                | PELLET<br>STOVE                | PELLET<br>STOVE                |
| <b>DIMENSIONS AND WEIGHT</b>                         |                                |                                |                                |                                |                                |                                |                                |
| Height   | 985                            | 1125                           | 1125                           | 1125                           | 1010                           | 1010                           | 965                            |
| Width  | 490                            | 585                            | 585                            | 465                            | 540                            | 540                            | 465                            |
| Depth  | 500                            | 570                            | 570                            | 500                            | 520                            | 520                            | 485                            |
| Flue diameter  | 80                             | 80                             | 80                             | 80                             | 80                             | 80                             | 80                             |
| Flue height  | 235                            | 210                            | 210                            | 210                            | 215                            | 215                            | 215                            |
| Log length (cm)                                      | Pellets<br>feed hopper 16,5 kg | Pellets<br>feed hopper 16,5 kg | Pellets<br>feed hopper 16,5 kg | Pellets<br>feed hopper 16,5 kg | Pellets<br>feed hopper 16,5 kg | Pellets<br>feed hopper 16,5 kg | Pellets<br>feed hopper 16,5 kg |
| Weight (kg)  | 134                            | 108                            | 108                            | 108                            | 85                             | 85                             | 85                             |
| <b>HEATING PERFORMANCE</b>                           |                                |                                |                                |                                |                                |                                |                                |
| Optimal heat output (kW) <sup>1</sup>                | 9                              | 10                             | 7                              | 10                             | 6                              | 9                              | 9                              |
| Heat output adjustment <sup>2</sup>                  | 3,4 to 9                       | 2,5 to 10                      | 2,5 to 7                       | 2,5 to 10                      | 2,5 to 6                       | 2,5 to 9                       | 2,5 to 9                       |
| Efficiency (%) <sup>3</sup>                          | 87,3                           | 80 to 86                       | 80 to 86                       | 80 to 86                       | 87 to 90                       | 87 to 90                       | 87 to 90                       |
| CO level (%) <sup>4</sup>                            | 0,016                          | 0,02 to 0,06                   | 0,02 to 0,06                   | 0,02 to 0,06                   | 0,02 to 0,06                   | 0,02 to 0,06                   | 0,02 to 0,06                   |
| Performance rate <sup>5</sup>                        | 0,1                            | 0,1                            | 0,1                            | 0,1                            | 0,1                            | 0,1                            | 0,1                            |
| Flamme verte <sup>6</sup>                            | 7 ★                            | 6 ★                            | 6 ★                            | 6 ★                            | 6 ★                            | 6 ★                            | 6 ★                            |
| Ductable<br>Compatible with BBC RT 2012 <sup>7</sup> | -                              | -                              | -                              | -                              | -                              | -                              | -                              |
| Autonomy<br>Extended burning <sup>8</sup>            | 7 to 20h                       | 7 to 27h                       | 9 to 27h                       | 7 to 27h                       | 11 to 27h                      | 7 to 27h                       | 7 to 27h                       |
| Heating volume (m <sup>3</sup> ) <sup>9</sup>        | 100/275                        | 85/300                         | 65/210                         | 85/300                         | 65/180                         | 85/275                         | 85/275                         |
| Heating surface (m <sup>2</sup> ) <sup>10</sup>      | 40/110                         | 35/120                         | 25/85                          | 35/120                         | 25/70                          | 35/110                         | 35/110                         |
| Post combustion system <sup>11</sup>                 | -                              | -                              | -                              | -                              | -                              | -                              | -                              |
| Adjustable secondary air <sup>12</sup>               | -                              | -                              | -                              | -                              | -                              | -                              | -                              |
| Warranty <sup>13</sup>                               | 2 years                        | 2 years                        | 2 years                        | 2 years                        | 2 years                        | 2 years                        | 2 years                        |
| Standard   | EN14785                        | EN14785                        | EN14785                        | EN14785                        | EN14785                        | EN14785                        | EN14785                        |
| Finish   | Anthracite                     | Black<br>Red<br>Grey           | Black<br>Red<br>Grey           | Black<br>Red<br>Grey           | Black<br>Grey                  | Black<br>Grey                  | Black                          |

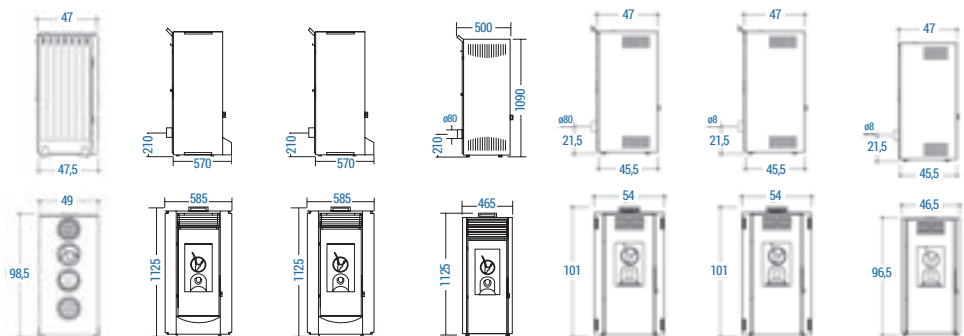



| 6417-1X<br>NOVEDIA 10          | 6417-7X<br>NOVEDIA 7           | 6189-65<br>LA ROYALE |
|--------------------------------|--------------------------------|----------------------|
| 113                            | 113                            | 114                  |
| <b>PELLET STOVE</b>            | <b>PELLET STOVE</b>            | <b>WOOD COOKER</b>   |
| 1125                           | 1125                           | 860                  |
| 500                            | 500                            | 912                  |
| 500                            | 500                            | 655                  |
| 80                             | 80                             | 150                  |
| 210                            | 210                            | 650                  |
| Pellets<br>feed hopper 16,5 kg | Pellets<br>feed hopper 16,5 kg | 30                   |
| 108                            | 108                            | 200                  |
| 10                             | 7                              | 10                   |
| 2,5 to 10                      | 2,5 to 7                       | 6,5 to 15            |
| ≥ 80                           | ≥ 80                           | 77                   |
| ≤ 0,06                         | ≤ 0,06                         | 0,28                 |
| ≤ 1                            | ≤ 1                            | 1,8                  |
| 5 ★                            | 5 ★                            | -                    |
| -                              | -                              | -                    |
| 7 to 27h                       | 9 to 27h                       | intermittent         |
| 85/300                         | 65/210                         | 135/300              |
| 35/120                         | 25/85                          | 55/120               |
| -                              | -                              | -                    |
| -                              | -                              | ✓                    |
| 2 years                        | 2 years                        | 1 year               |
| EN14785                        | EN14785                        | EN12815              |
| Ivory<br>Bordeaux<br>White     | Ivory<br>Bordeaux<br>White     | Black<br>enamel      |

1. Measured in kW, the optimum or nominal heat output is the average heat delivered to the user at normal burning rate, while providing necessary wood. It can be directly compared to nominal output delivered by other heating systems or energies.

2. Possibility of adjusting heat output to your house or room requirements. The minimum heat output indicated corresponds to the reduced burning rate. Wood combustion speed varies during the 1 hour lab test. The maximal heat output is observed during a quarter hour at the peak activity of the fire (highest burning rate).

3. Tells how much of the energy in the wood will be given in the room / house when you use a firebox. Highest efficiency will allow you to decrease wood consumption.

4. CO level: Carbon monoxide is a gas produced by incomplete combustion of wood. CO level is the main indicator of combustion cleanliness.

5. Energy performance rate measured from 3 criteria: efficiency, CO level, dust emissions.

6. Flamme verte: this quality chart guarantees a minimum of 70% efficiency and a CO emission lower than 0,3%. Environmental performances rating (5 to 7 stars).

7. Air-tight stove with possible connection of air supply. Compatible with sustainable houses / centralized fresh air supply from the duct:  
- No outside air passage in the room  
- Possibility to connect an air supply duct drawing fresh air from the outside or crawl space.

8. Autonomy : number of hours, a pellet stove can operate without reloading the feed-hopper with pellets. It depends on the use at the nominal or reduced power and on the capacity of the feed-hopper.  
The extended burning guarantees that the stove will continue to operate at a reduced burning rate during a minimum period of time without any log supply. The embers will last over this period.


9. Indicative heating volume. This data depends on many factors such as house insulation or lay out, altitude and region where you are living.

10. Indicative heating surface (with a 2,50 m room height).

11. Injection of pre-heated air into the combustion chamber. The additional air arrival by the back of the firebox enables re-lighting of combustion residues, dust and hydrocarbon thus obtaining a complete combustion and a reduced pollution emission.

12. The secondary air circulates along the glass and protects it from the soot and smoke. It burns off volatile substances. The possibility of adjusting secondary air allows adaptation of the appliance to excess draught conditions.

13. Terms of the warranty are listed in the stove manual of use.

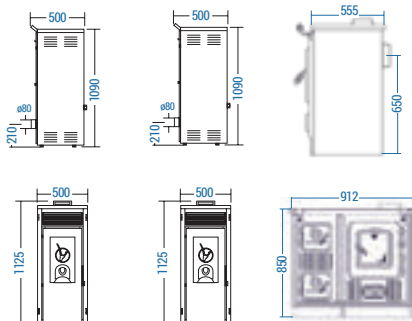

Registered models. All rights reserved. This document is not contractually binding. Suggestion of presentation. INVICTA reserves the right to modify its models without notice. The weights and dimensions indicated in this catalogue are approximate. Terms of the warranty are listed in the stoves manual of use.



# INVICTA

Plus beau. Plus chaud. Moins cher.

ZONE INDUSTRIELLE / LIEU DIT LA GRAVETTE - 08350 DONCHERY - FRANCE

Tél. +33 (0) 3 24 27 71 71 - Fax. +33 (0) 3 24 26 62 42

[www.invicta.fr](http://www.invicta.fr)

